




HYDROSHOP

www.hydroshop.ee ESTONIA

Wiper seal type PWY

d 16 – 200 mm

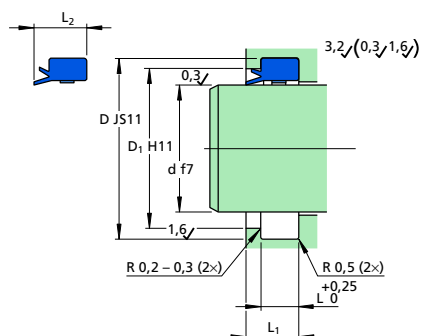

Type PWY

Wiper seal of polyurethane for installation in housing dimensions according to ISO 6195, type A. Type PWY has an outwardly directed sealing lip to provide better static sealing ability in the housing.

Dimensions						Designation	ISO 6195-A
d	D	L	L ₁	L ₂	D ₁		
mm						–	
16	24	5	+0,2	7	7,8	21,5	CR PWY 16×24×5×7.8 •
18	26	5	+0,2	7	7,8	23,5	CR PWY 18×26×5×7.8 •
20	28	5	+0,2	7	7,8	25,5	CR PWY 20×28×5×7.8 •
22	30	5	+0,2	7	7,8	27,5	CR PWY 22×30×5×7.8 •
25	33	5	+0,2	7	7,8	27,5	CR PWY 25×33×5×7.8 •
28	36	5	+0,2	7	7,8	31	CR PWY 28×36×5×7.8 •
32	40	5	+0,2	7	7,8	37,5	CR PWY 32×40×5×7.8 •
35	43	4	+0,2	5	7	41	CR PWY 35×43×4×7 •
36	44	5	+0,2	7	7,8	39	CR PWY 36×44×5×7.8 •
40	48	5	+0,2	7	7,8	45,5	CR PWY 40×48×5×7.8 •
45	53	4	+0,2	5	7	51	CR PWY 45×53×4×7 •
	53	5	+0,2	7	7,8	50,5	CR PWY 45×53×5×7.8 •
50	58	5	+0,2	7	7,8	55,5	CR PWY 50×58×5×7.8 •
55	63	4	+0,2	5	7	61	CR PWY 55×63×4×7 •
	65	6,3	+0,2	8,3	9	62	CR PWY 55×65×6.3×9 •
56	64	4	+0,2	5	7	62	CR PWY 56×64×4×7 •
	66	6,3	+0,2	8,3	9	63	CR PWY 56×66×6.3×9 •
60	68	4	+0,2	5	7	66	CR PWY 60×68×4×7 •
	70	6,3	+0,2	8,3	9	67	CR PWY 60×70×6.3×9 •
63	73	6,3	+0,2	8,3	9	70	CR PWY 63×73×6.3×9 •
65	73	4	+0,2	5	7	71	CR PWY 65×73×4×7 •
70	80	6,3	+0,2	8,3	9	77	CR PWY 70×80×6.3×9 •
80	90	6,3	+0,2	8,3	9	87	CR PWY 80×90×6.3×9 •



HYDROSHOP

www.hydroshop.ee ESTONIA

Dimensions						Designation	ISO 6195-A
d	D	L	L ₁	L ₂	D ₁		
mm						–	
90	100	6,3 +0,2	8,3	9	97	CR PWY 90×100×6.3×9	•
100	115	9,5 +0,3	12	13	110	CR PWY 100×115×9.5×13	•
110	125	9,5 +0,3	12	13	120	CR PWY 110×125×9.5×13	•
125	140	9,5 +0,3	12	13	135	CR PWY 125×140×9.5×13	•
140	155	9,5 +0,3	12	13	150	CR PWY 140×155×9.5×13	•
160	175	9,5 +0,3	12	13	170	CR PWY 160×175×9.5×13	•
180	195	9,5 +0,3	12	13	190	CR PWY 180×195×9.5×13	•
200	215	9,5 +0,3	12	13	210	CR PWY 200×215×9.5×13	•