


# 50AS-RUBBER vahesiduri element

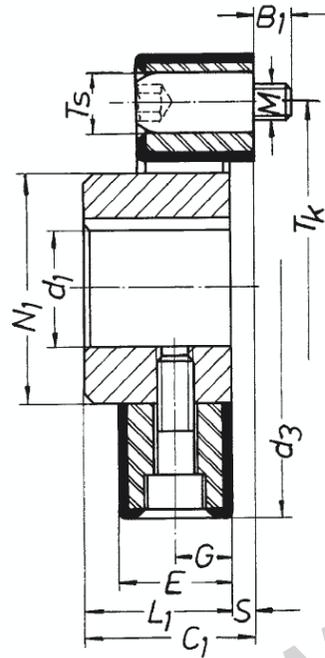

	$d_1$		$d_2$		$d_3$	A	B	$B_1$	$C_1$	E	G	$L_1$	$L_2$	$L_3$	M	$N_1$	$N_2$	S	TS
	min.	max.	min.	max.															
50	20	65	25	100	200	58	16	16	74	50	25	66	66	140	M 16	100	140	8	25

T	R	P	O	TK/Division	Weight [kg]					Mass moment of Inertia [kg·cm <sup>2</sup> ]				
					Type 0	Type 1	Type 2	Type 1/S	Type 2/S	Type 0	Type 1	Type 2	Type 1/S	Type 2/S
24.5	16.5	34.5	34.5	165/4x90°	1.60	6.04	15.60	6.50	16.05	104.0	205.0	550.5	253.4	598.9