




| | | |
|---|---|----------------------------------|
| Sizes 45, 80, 112, 140 and 200 Up to 203 kW and 320bar | Swash-plate Axial Piston Pump B Series K3VL | Data Sheet P-1002/01.06 GB |
| <div style="text-align: right; margin-bottom: 20px;">  </div> <div style="text-align: center; margin-bottom: 20px;">  </div> <p>Features</p> <ul style="list-style-type: none"> ◇ SAE and ISO mount. ◇ Small installation envelope. ◇ Through drive. ◇ SAE and metric ports. ◇ Side and rear porting. ◇ Vertical mount capability. ◇ Multiple drain ports. ◇ CW and CCW rotation. ◇ Opposed stroking pistons. ◇ Rated pressure 320 bar. ◇ Swash plate pillow support. ◇ Maximum displacement stop. ◇ Servo assist springs. ◇ Hydrostatic pillow bearing. ◇ Overcentre bleed. ◇ Pressure compensation. ◇ Integral proportional pressure. ◇ Load sensing. ◇ Integral unload. ◇ Torque limiter. ◇ Rigid construction. ◇ Long life roller bearings. ◇ Various sealing options. ◇ Low pulsation. ◇ Proven rotating group. ◇ Sine wave valve plate. ◇ Separate swash plate. ◇ Spherical valve plate. ◇ Super-finished bores. ◇ Solid pistons. | | |
| Model K3VL | Page 1.64 | Data Sheet P-1002/01.06 |
|  | | |


General Description

The K3VL Series Swash Plate Type Axial Piston Pumps are designed to specifically satisfy the mobile, marine and general industrial machinery market where a medium pressure variable displacement pump is required. K3VL Pumps are available in nominal displacements ranging from 45 to 140 cm³/rev with various pressure, torque limiter, and combination load sensing control options.


Technical Description

The components of the K3VL pump can be divided into three sub-groupings:

- Rotating Group** – Providing the main rotary pumping action.
- Swash Plate Group** – To vary the pump’s delivery flow rate.
- Valving Cover Group** – Providing the switching of oil between suction and delivery ports.

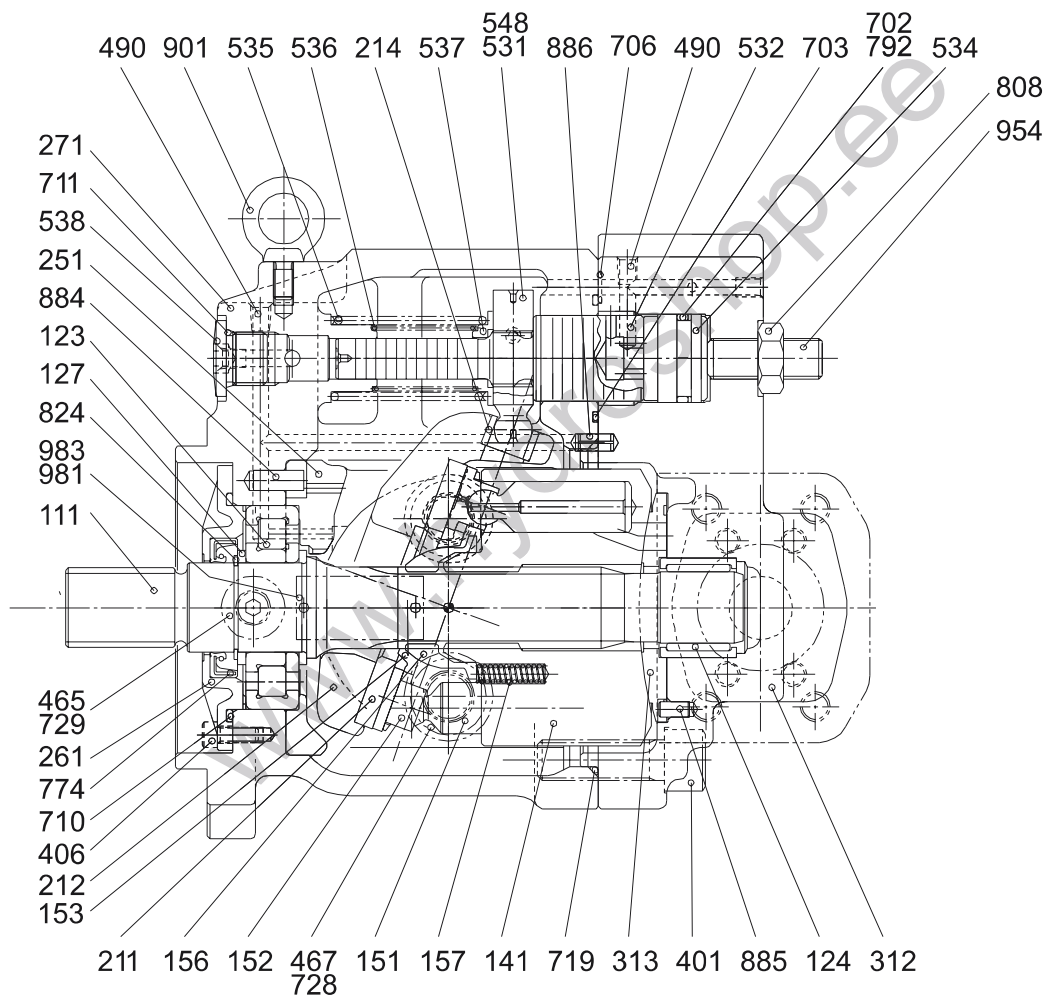

K3VL80 Cross Section



Technical Description (continued)**The Rotating Group**

The Rotating Group comprises:

- (a) Drive shaft, 111
- (b) Cylinder block, 141
- (c) Pistons, 9 x 151
- (d) Shoes, 9 x 152
- (e) Setting plate, 153
- (f) Spherical bush, 156
- (g) Cylinder springs, 9 x 157

The drive shaft is coupled to the cylinder block through a splined section and supported at both of its ends by bearings and the drive shaft. The shoe is swaged over the spherical end of the piston forming a spherical ball joint. Additionally the shoe has a hydrostatic pocket to balance the hydraulic thrust developed by the piston pressure allowing the shoe to lightly slide against the shoe plate.

The subgroup consisting of the pistons and shoes are pressed against the shoe plate by the cylinder springs acting through the setting plate and the spherical bush. The force developed by these cylinder springs also press the cylinder block against the valve plate. With the smallest K3VL45 unit a single centralised spring with individual push pins provide the shoe and cylinder block hold down force.

Swash Plate Group

The Swash Plate Group comprises:

- (a) Swash plate, 212
- (b) Shoe plate, 211
- (c) Swash plate support, 251
- (d) Tilting bush, 214
- (e) Tilting pin, 531
- (f) Servo piston, 532
- (g) Servo assist springs, 535 & 536

The swash plate on the reverse side to the shoe location is a cylindrical form which is a "pillow" supported by the hydrostatic bearing provided by the swash plate support. The tilting bush is inserted into the swash plate and into this is installed the spherical portion of the tilting pin which is coupled to the servo piston.

Any linear movement of the servo piston produced by the regulator pressure applied to either end is translated through the tilting pin into an angular movement of the swash plate which varies the tilting or swash angle of the pump. A screw adjuster and lock nut is available to adjust the maximum tilting angle condition. The servo assist springs are provided to ensure good on stroking response particularly at low operating pressures.



Technical Description (continued)**Valve Cover Group**

The Valve Cover Group comprises:

- (a) Valve cover, 312
- (b) Valve plate, 313
- (c) Valve plate, 885

The valve plate with its two "kidney" shaped ports is installed onto the valve plate located by the valve plate pin. These two ports serve to supply and exhaust oil to and from the cylinder block. The oil passage switched by the valve plate is connected to the externally piped suction and outlet pressure ports through the valve cover. This valve plate is spherical in form for all but the smallest 45 unit.

Pump Operation

When the pump's drive shaft is driven by a prime mover (Electric motor, Engine etc.), the cylinder block being spline coupled to the shaft will also rotate. If the swash plate has been tilted, the pistons arranged in the cylinder block due to the shoe being retained on the swash plate surface will both rotate with the cylinder block and reciprocate once per revolution. Paying attention to one such piston then it will move away from the valve plate for half a rotation (suction stroke) and move towards the valve plate for the second half of rotation (oil delivery stroke). The larger the tilt angle, the longer the piston stroke and the higher is the pump's displacement. As the swash plate tilting angle approaches so the piston makes no stroke and thereby delivers no oil.

Through Drive Option

The pump is available with a through drive capability (see installation section) where a through drive shaft with splined end is incorporated capable of taking a similar torque to that of the pump itself and an SAE "A" mounting interface is provided.

By suitable use of adaptors and splined couplings a wide variety of through drive mounting capabilities are available. The formation of these kits and their relevant part numbers will be found in the installation section.

www.hydroshop.com



Model
K3VL

Page
4.64

Data Sheet
P-1002/01.06

Technical Data

For applications outside the following parameters, please consult Kawasaki Precision Machinery (UK) Ltd.


Hydraulic Data

Pressure Fluid

Mineral oil, phosphate ester, fatty acid ester and water glycol.
Phosphate ester is only suitable for use with FPM seals.

Use a high quality, anti-wear, mineral based hydraulic fluid when the pressure exceeds 207 bar. In applications where fire resistant fluids are required consult Kawasaki Precision Machinery (UK) Ltd. The following chart illustrates the effects on pump life when non-standard fluids are used:

Fluid selection

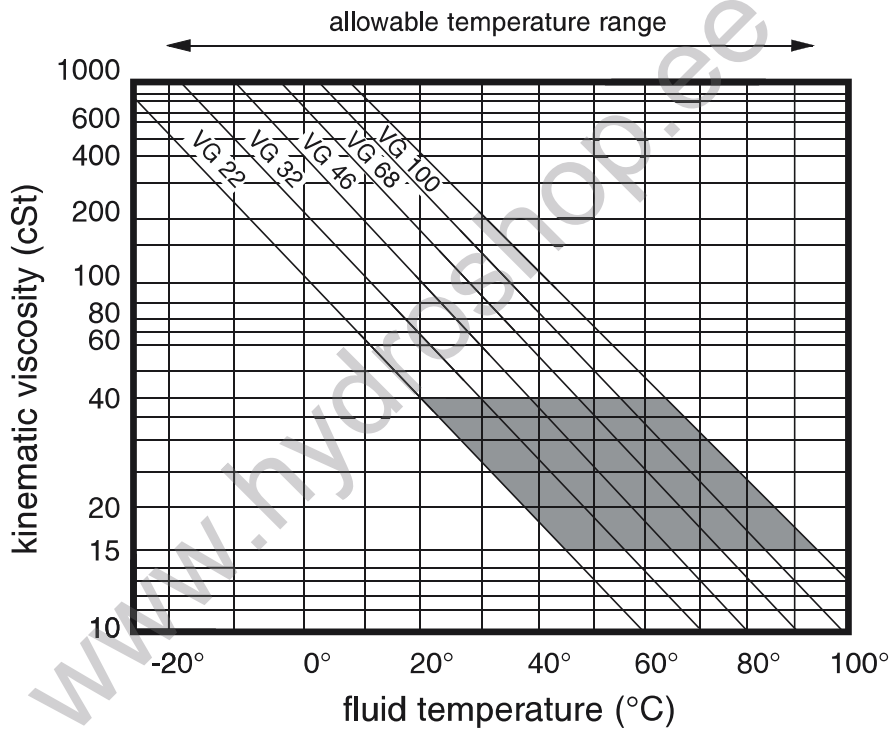

Technical Data (continued)**Filtration & Contamination Control****Filtration**

The most important means to prevent premature damage to the pump and associated equipment and to extend its working life, is to ensure that hydraulic fluid contamination control of the system is working effectively.

This begins by ensuring that at the time of installation that all piping, tanks etc. are rigorously cleaned in a sanitary way. Flushing should be provided using an off line filtration system and after flushing the filter elements should be replaced.

A full flow return line filter of 10 micron nominal should be utilised and in addition a 150 micron mesh suction strainer is recommended. Typical filtration circuits are shown in the K3VL brochure.

To prevent contaminant ingress from the external environment a 5 to 10 micron filter within the tanks breather is also recommended.

Suggested Acceptable Contamination Level

The relationship between contamination level and pump life is very difficult to predict as it depends on the type and nature of the contaminant present in the system. Sand or Silica in particular, due to its abrasive nature, does significantly reduce the expected life of a pump.

Based on the precondition that there is no significant presence of Silica type substances then a minimum Cleanliness level of 18/15 to ISO/DIS 4406 (NAS Class 9) is recommended.

Working Fluid Types**Anti-Wear Type Hydraulic fluid**

It is generally recommended to use an anti-wear type hydraulic fluid as the mineral oil type when the operating pressure exceeds 210 bar.

Fire-resistant Fluids

Some kind of fire-resistant fluids require special materials for seals, paint and metal finishing. Please consult Kawasaki Precision Machinery (UK) Limited and provide details of the particular fluid specification and the working conditions so that any special requirements can be ascertained.

In general, fire-resistant fluids have a low viscosity index and their viscosity also changes significantly with operating temperature and service life. For this reason, the circuit should be provided with an adequately sized cooler or forced cooling so that temperatures can be stabilised.

Due to the inherent water content of some of these fluids the minimum allowable suction pressure will be higher than that of an equivalent mineral oil and so needs to be fully evaluated by Kawasaki Precision Machinery (UK) Limited. The following table provides an overview of the precautions and characteristics that can be expected with these types of fluids.



Model
K3VL

Page
6.64

Data Sheet
P-1002/01.06

Technical Data (continued)

Fire-resistant Fluids (continued)

| parameter :- / fluid type:- | mineral oil | phosphate ester | polyol ester | water glycol |
|--|-------------|-----------------|--------------|--------------|
| Maximum Pressure (bar) | 320 | 320 | 320 | 210 |
| Recommended Temperature Range (deg C) | 20 ~ 60 | 20 ~ 60 | 20 ~ 60 | 10 ~ 50 |
| Cavitation susceptibility | ○ | △ | △ | △ |
| Expected life expectancy compared to mineral oil | 100% | 60% ~ 100% | 50% ~ 100% | 20% ~ 80% |

○ recommended

△ usable (higher density)

www.hydroshop.es

Technical Data (continued)**Pump Start Up Precautions****Pump Case Filling**

Be sure to fill the pump casing with oil through the drain port - filling only the suction line with oil is totally insufficient. The pump contains bearings and high-speed sliding parts including pistons with shoes and spherical bushes that need to be continuously lubricated. Part seizure or total premature failure will occur very quickly if this procedure is not rigidly followed.

Piping & Circuit Checking

Check to see that the piping and full hydraulic circuit is completed and that any gate valves etc. are open.

Direction of Rotation Check

Check to ensure that direction of rotation is correct and that the suction and delivery lines are connected correctly.

Start Up

Jog start the motor and check once more for correct rotation. Run the pump unloaded for a period to ensure that all residual air within the system is released. Check for external leakage, abnormal noise and vibrations.

Case Drain Pressure

Please ensure, as stated previously, that the maximum steady state drain line pressure at the pump casing does not exceed 1 bar. (Maximum peak pressure 4 bar). A suitable drain line hose and drain line filter when required must be selected to ensure this.

Long Term Out of Usage

It is undesirable to leave the pump out of use for a long period of a year or more. In such a situation it is recommended that the pump is run for a short period on a more frequent basis even if it is just unloaded. With regard to a pump held in storage then rotating the shaft on a frequent basis is sufficient. If the pump is left out for more than the suggested time it will require a service inspection.

www.hydroshop.ie

Model
K3VL

Page
8.64

Data Sheet
P-1002/01.06



Kawasaki
Hydraulic Products

Technical Data (continued)

Specifications

The following table shows the specifications for the complete K3VL pump range.

More detailed efficiency curves and other related information will be found in a later section.

| | | | | | | | | | | | |
|--------------------------------|--------------|--------------|----------------------|--------------|----------|--------------|----------|--------------|----------|--------------|--|
| pump model | | 45 | 80 | 112 | 140 | 200 | | | | | |
| capacity | | cc/rev | 45 | 80 | 112 | 140 | 200 | | | | |
| pressure ratings | rated | bar | 320 | | | | | | | | |
| | peak | bar | 350 | | | | | | | | |
| Speed ratings | self prime | rpm | 2700 | 2400 | 2200 | 2200 | 1900 | | | | |
| | max. boosted | rpm | 3250 | 3000 | 2700 | 2500 | 2200 | | | | |
| min operating speed | | rpm | 600 | | | | | | | | |
| case drain pressures | max | bar | 1 | | | | | | | | |
| | peak | bar | 4 | | | | | | | | |
| Weight | | kg | 25 | 34 | 60 | 60 | 100 | | | | |
| case fill capacity | | cc | 600 | 800 | 1000 | 1000 | 1000 | | | | |
| max allowable input torque | | Nm | 225 | 400 | 981 | 981 | 1000 | | | | |
| mounting flange | type | SAE B | ISO 100 | SAE C | ISO 125 | SAE D | ISO 180 | SAE D | ISO 180 | SAE E | |
| | bolts | 2 | 2 | 2 | 2 | 4 | 4 | 4 | 4 | 4 | |
| input shaft | type | SAE B-B | ISO 25mm | SAE C | ISO 32mm | SAE D | ISO 45mm | SAE D | ISO 45mm | SAE D | |
| | form | spline & key | key | spline & key | key | spline & key | key | spline & key | key | spline & key | |
| allowable through drive torque | SAE 'A' | Nm | 61 | | | | | | | | |
| | SAE 'A-A' | | 118 | | | | | | | | |
| | SAE 'B' | | 203 | | | | | | | | |
| | SAE 'B-B' | | 225 | | | | | | | | |
| | SAE 'C' | | | | | | 400 | | | | |
| | SAE 'C-C' | | | | | | 559 | | | | |
| | SAE 'D' | | | | | | 699 | | | | |
| Temperature range | | °C | -20 to 95 | | | | | | | | |
| viscosity range | | cSt | 10 to 1,000 | | | | | | | | |
| max. contamination level | | | 18/15 (ISO/DIS 4406) | | | | | | | | |

Notes:**Rated Pressure**

Pressure at which life and durability will not be affected.

Peak Pressure

The instant allowable surge pressure as defined by DIN 24312. Life and durability however will be shortened.

Maximum Self Priming Speed

Values are valid for an absolute suction pressure of 1 bar. If the flow is reduced, or if the inlet pressure is increased the speed may also be increased (refer to section 4.2)

Maximum Boosted Speed

Values stated are the absolute maximum permitted speed for which an increased inlet pressure will be required. (refer to section 4.2)

Weight

Approximate dry weights, dependant on exact pump type.

Hydraulic Fluid

Mineral anti wear hydraulic fluid – for other fluid types please consult KPM

Viscosity Range

If viscosity is in range 200 to 1,000 cSt, then warming up is necessary before commencing full scale running.

Model
K3VL


Page
9.64

Data Sheet
P-1002/01.06



Kawasaki
Hydraulic Products

| Ordering Code – K3VL Series | | | |
|---|---------|---------------|---|
| | K3VL 80 | B - 1 0 R S S | L O 12D /1 H* |
| K3VL Series Pump | | | Additional control options Blank Without additional limiter |
| Maximum displacement | | | Torque limit control /1-L* Low setting range /1-M* Medium setting range /1-H* High setting range |
| 45 45 cm ³ /rev 80 80 cm ³ /rev 112 112 cm ³ /rev 140 140 cm ³ /rev 200 200 cm ³ /rev | | | Displacement control (Without torque limit) /1-E0 Electrical displacement control (pilot pressure required) /1-Q0 Pilot operated displacement control |
| Design series B | | | Parallel control control (Without torque limit) /1-PP Parallel pressure compensation control |
| Hydraulic Fluid Type – Mineral oil W Water glycol Z Phosphate ester | | | Unloader solenoid (Type N below) blank For all other options except PN & LN 115A 115V AC, 50.60Hz, DIN 43550 Plug 235A 230V AC, 50.60Hz, DIN 43550 Plug 12D 12V DC, DIN 43550 Plug 24D 24V DC, DIN 43550 Plug |
| Circuit type 1 Open circuit | | | Additional pressure control 0 No additional control N With integrated unloading valve V With integrated remote control valve R With inverse integrated remote control valve 1 Load sensing only (R4 plugged) |
| Through drive & porting 0 Single pump, side ported A SAE "A" through drive, side ported B SAE "B" through drive, side ported BB SAE "BB" through drive, side ported C SAE "C" through drive, side ported D SAE "D" through drive, side ported R Single pump, rear ported S Single pump with plastic cover (Stock Pump) N Single pump with Steel cover, side ported | | | Control device configuration P Remote pressure compensator L Load sensing & pressure control |
| Direction of rotation R Clockwise rotation L Counter-clockwise rotation | | | Porting threads M Metric threaded S UNC threaded |
| Mounting flange & shaft S SAE spline & mount (see drawing for detail) M ISO key & mount (see drawing for detail) K SAE key & mount (see drawing for detail) T* SAE B spline & SAE B 2 bolt mount for 45 (not 80) SAE CC spline & SAE D 4 bolt mount for 112/140 U* 45 only, SAE B key & SAE B 2 bolt mount C* 112/140 only, SAE C spline & SAE C 2 bolt mount R* 112/140 only, SAE C spline & SAE D 4 bolt mount X* 112/140 only, SAE C key & SAE C 2 bolt mount W* 112/140 only, SAE CC spline & SAE C 2 bolt mount (*Non standard options) | | | |




Kawasaki
Hydraulic Products

| | | | |
|---------------|---------------|----------------------------|--|
| Model K3VL | Page 10.64 | Data Sheet P-1002/01.06 | |
|---------------|---------------|----------------------------|--|

Performance - K3VL45

Performance Curve


(Speed Range 1500 rpm & 1800 rpm with atmospheric inlet)
 Test temperature 50°C, Viscosity 31cSt (ISO VG 46)

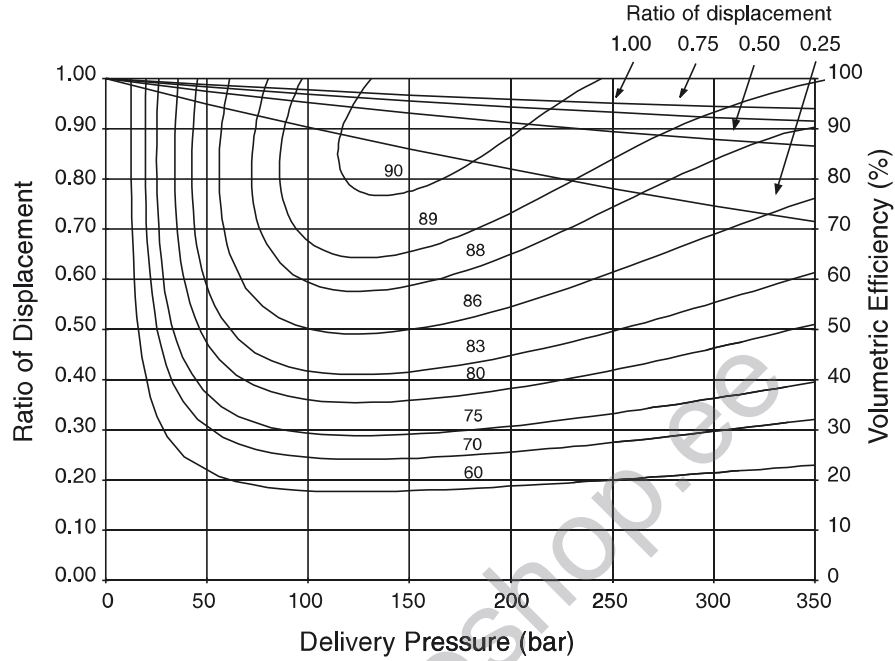

Power Curve

Note: Atmospheric Inlet, Full displacement


K3VL45 Theoretical Power Curve

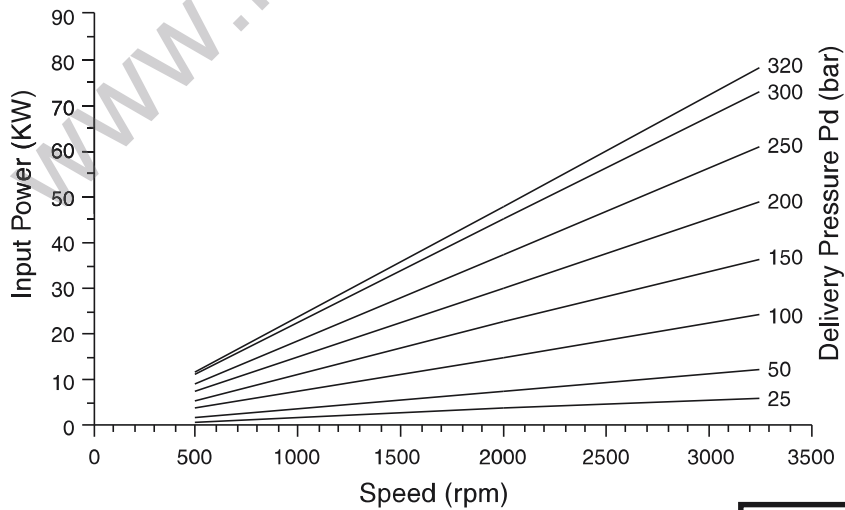

Performance K3VL80

Performance Curve


(Speed Range 1500 rpm & 1800 rpm with atmospheric inlet)
 Test temperature 50°C, Viscosity 31cSt (ISO VG 46)

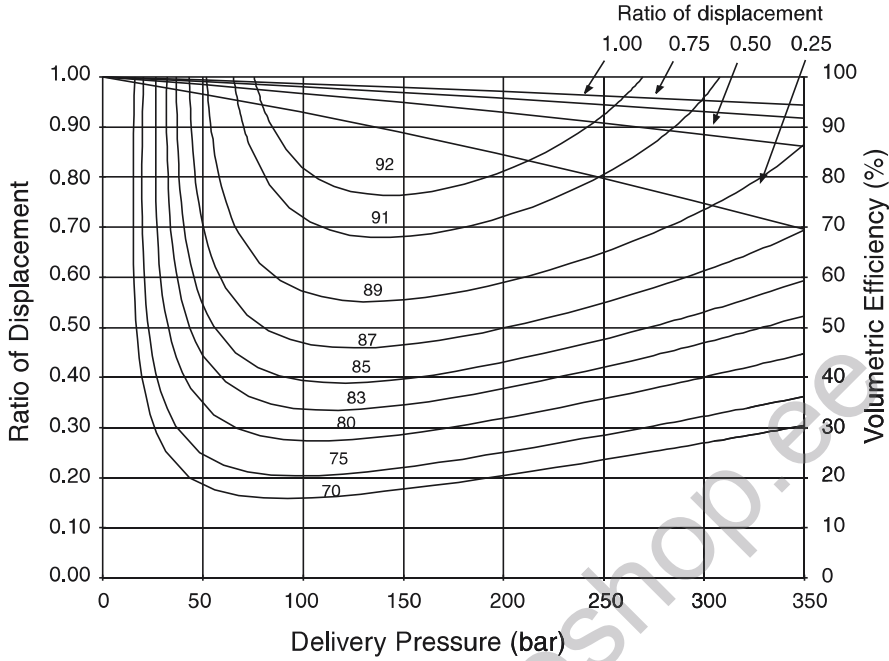

Power Curve

Note: Atmospheric Inlet, Full displacement


K3VL80 Theoretical Power Curve

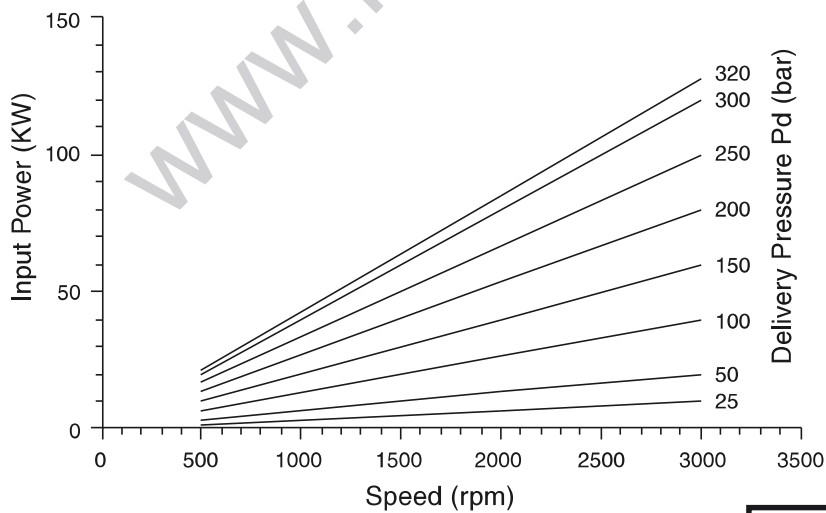

Performance - K3VL112

Performance Curve


(Speed Range 1500 rpm & 1800 rpm with atmospheric inlet)
 Test temperature 50°C, Viscosity 31cSt (ISO VG 46)

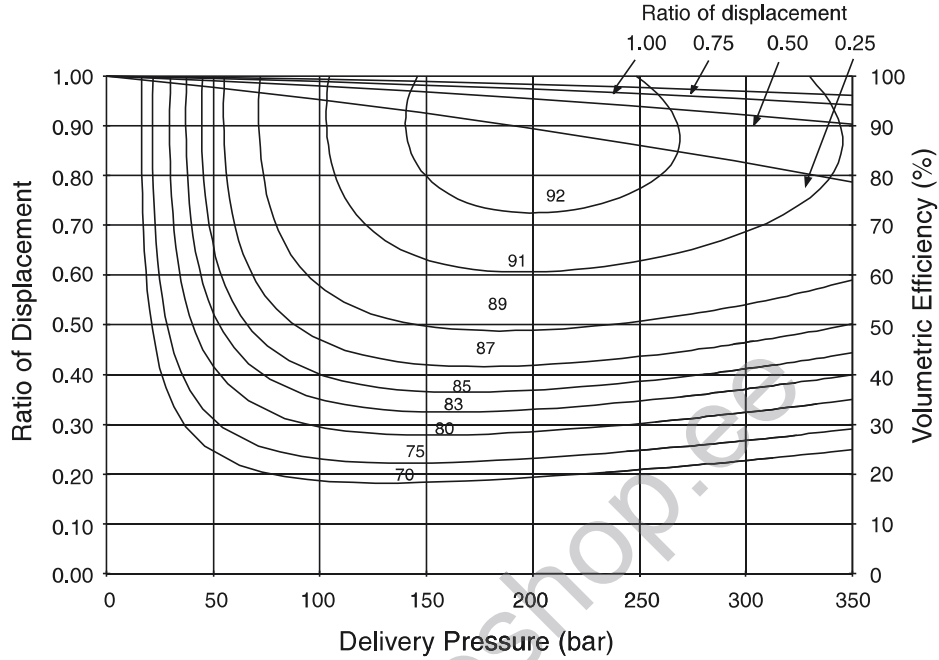

Power Curve

Note: Atmospheric Inlet, Full displacement


K3VL112 Theoretical Power Curve

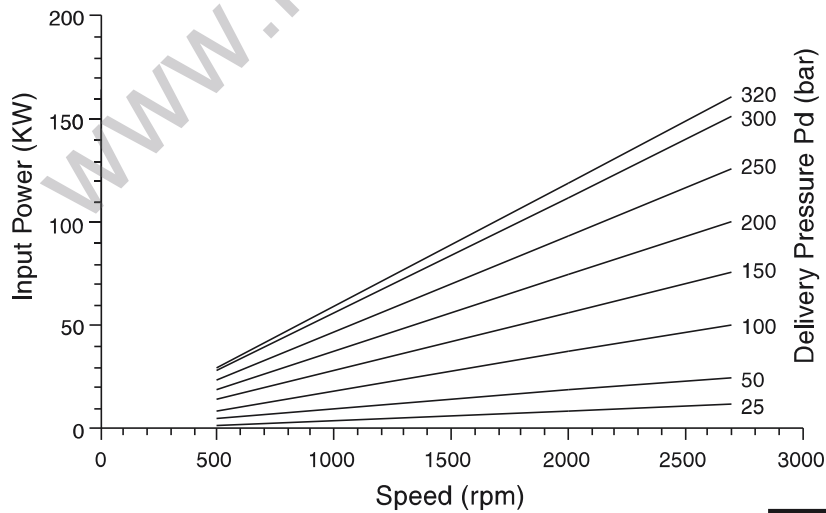

Performance - K3VL140


Performance Curve

(Speed Range 1500 rpm & 1800 rpm with atmospheric inlet)
 Test temperature 50°C, Viscosity 31cSt (ISO VG 46)

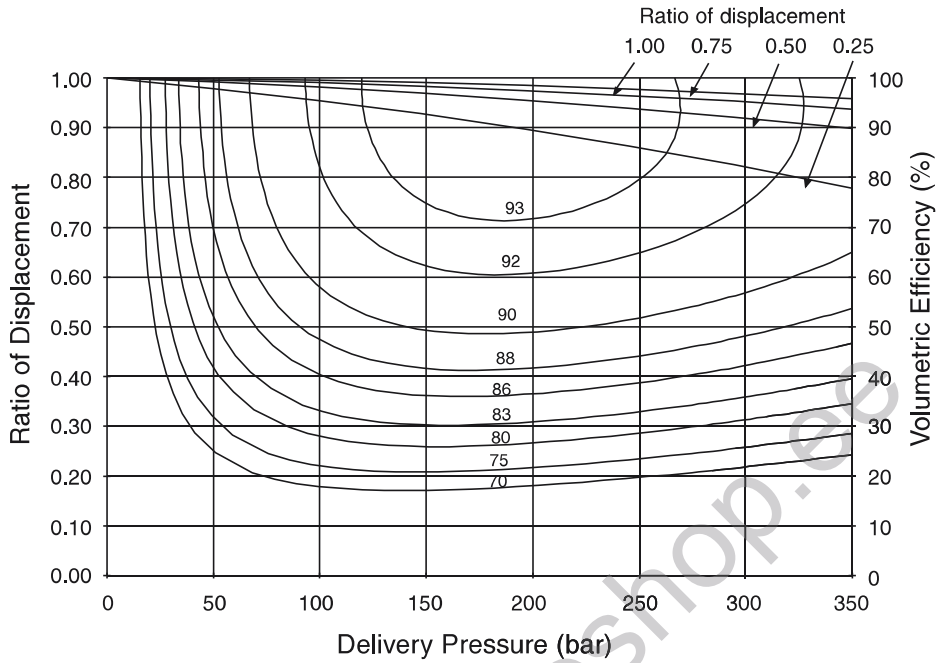

Power Curve


Note: Atmospheric Inlet, Full displacement

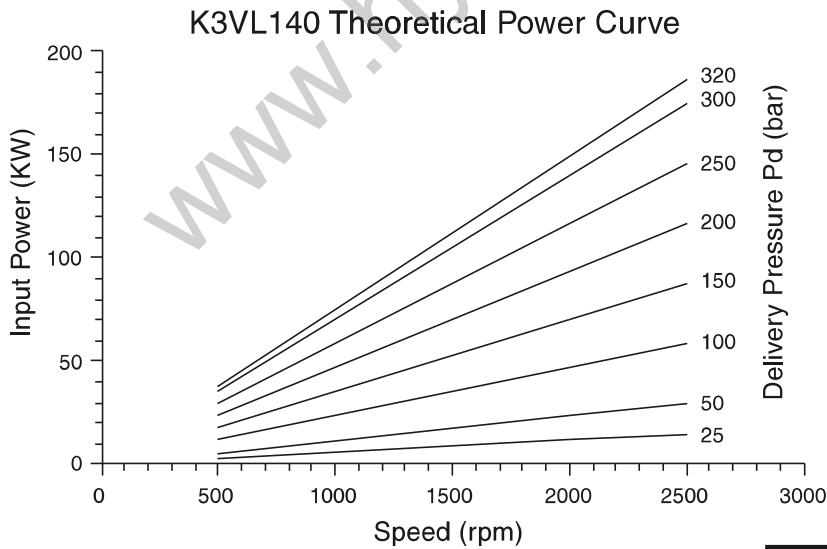

Performance - K3VL200

Performance Curve


(Speed Range 1500 rpm & 1800 rpm with atmospheric inlet)
 Test temperature 50°C, Viscosity 31cSt (ISO VG 46)

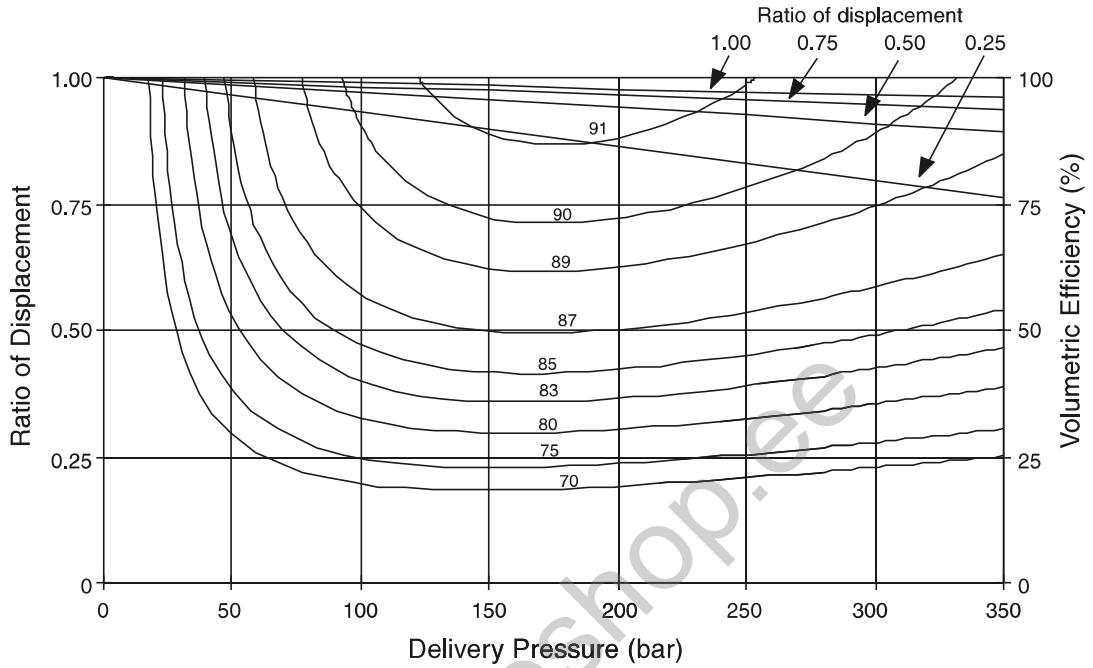

Power Curve


Note: Atmospheric Inlet, Full displacement

K3VL200 Theoretical Power Curve

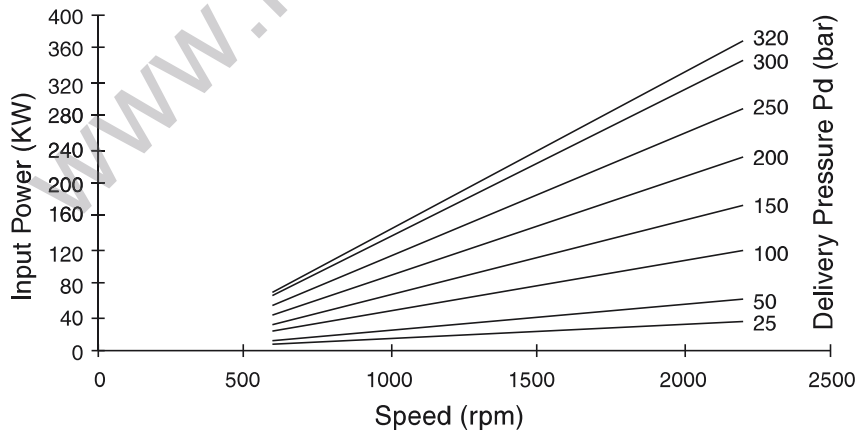


Self Priming Curves

K3VL45 Self Priming Capability

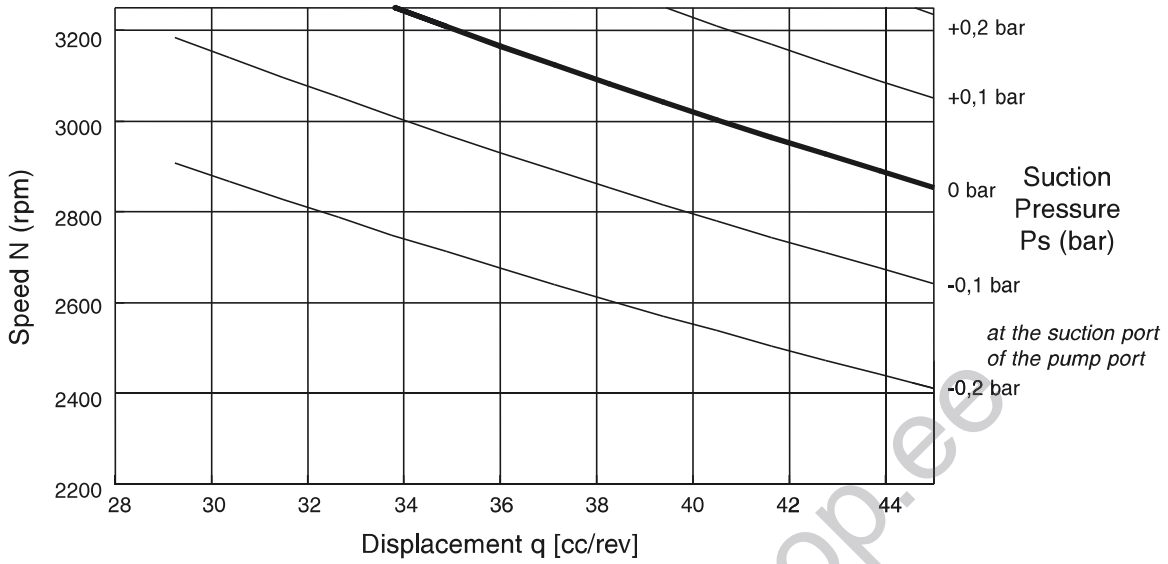


K3VL80 Self Priming Capability

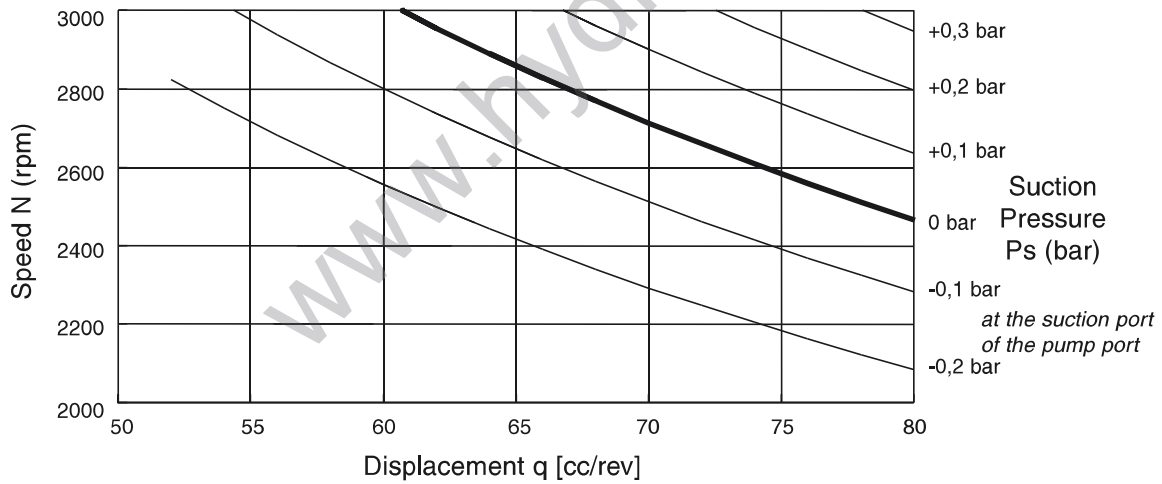


Self Priming Curves (continued)

K3VL112 Self Priming Capability

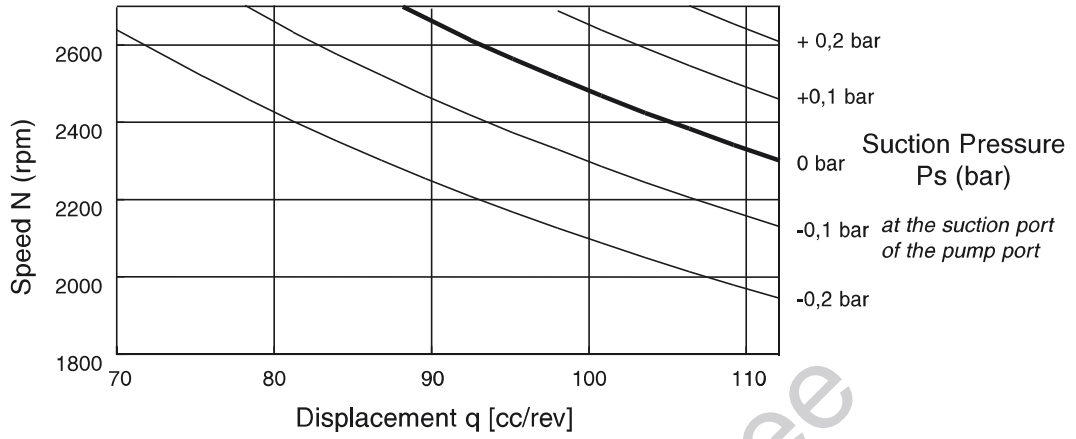


K3VL140 Self Priming Capability

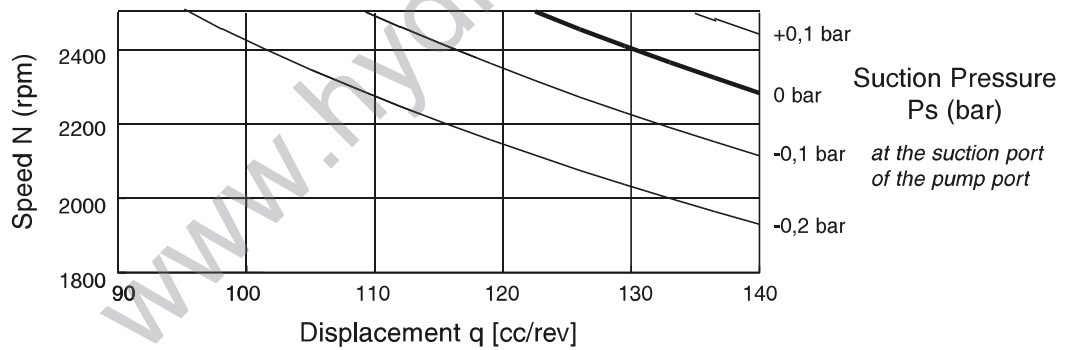

Self Priming Curves

K3VL200 Self Priming Capability

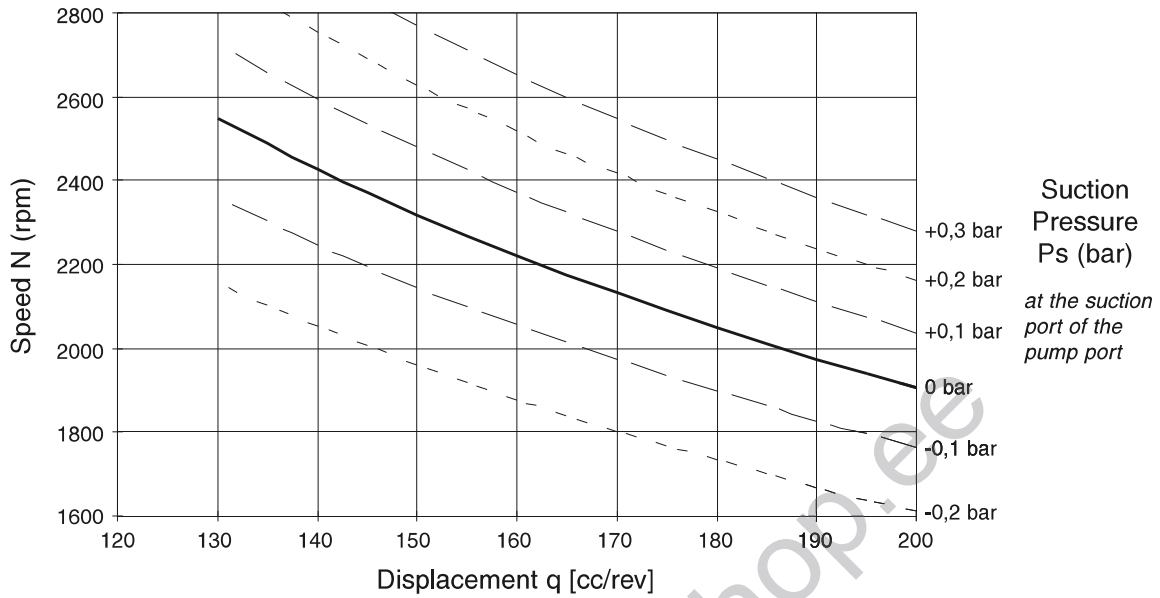

www.hydroshop.be




Model
K3VL

Page
18.64


Data Sheet
P-1002/01.06

Pressure pulsation

K3VL45 pulsation graph

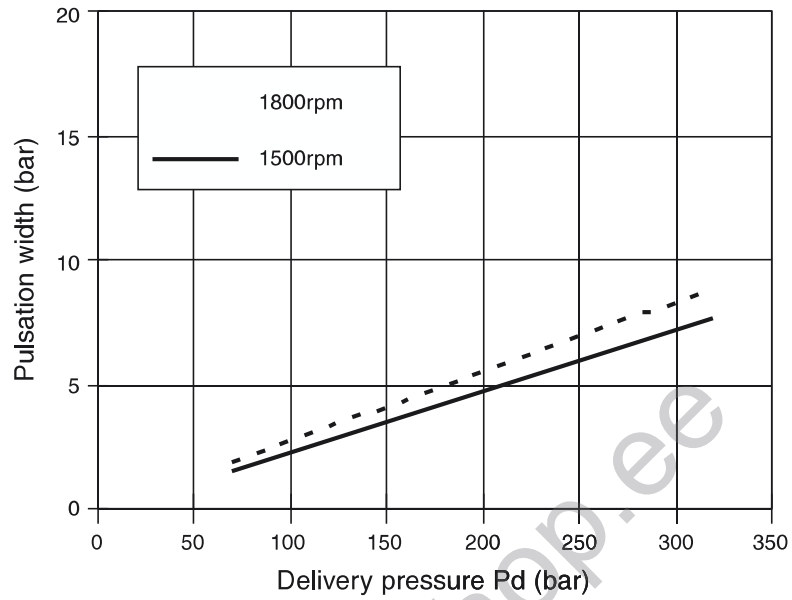


K3VL80 pulsation graph

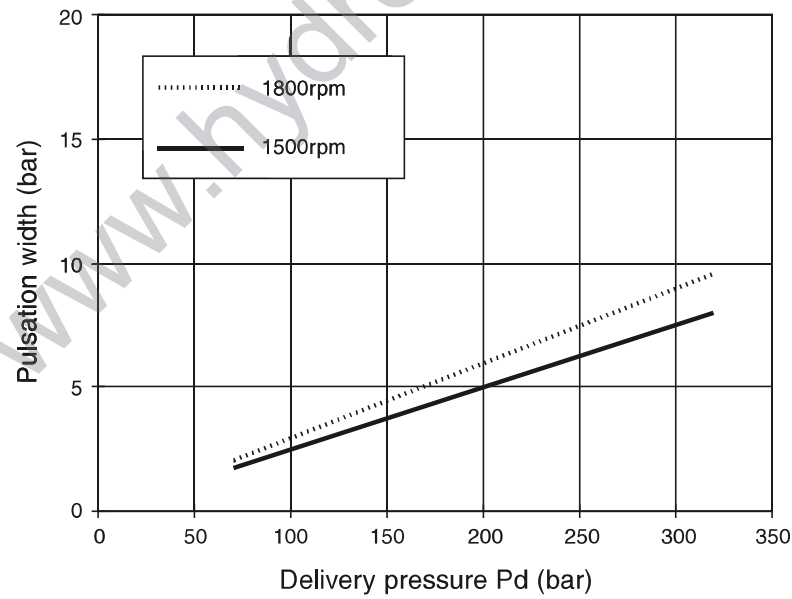


Pressure pulsation (continued)

K3VL112 pulsation graph

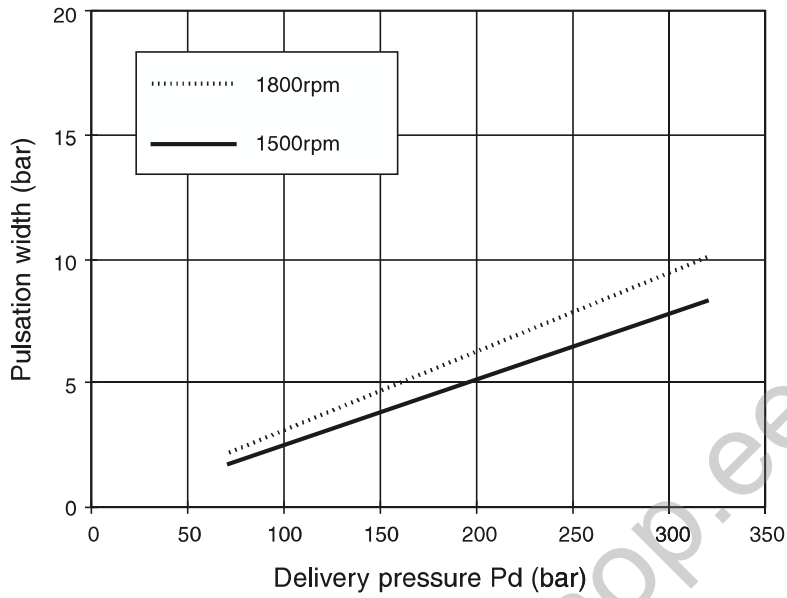


K3VL140 pulsation graph

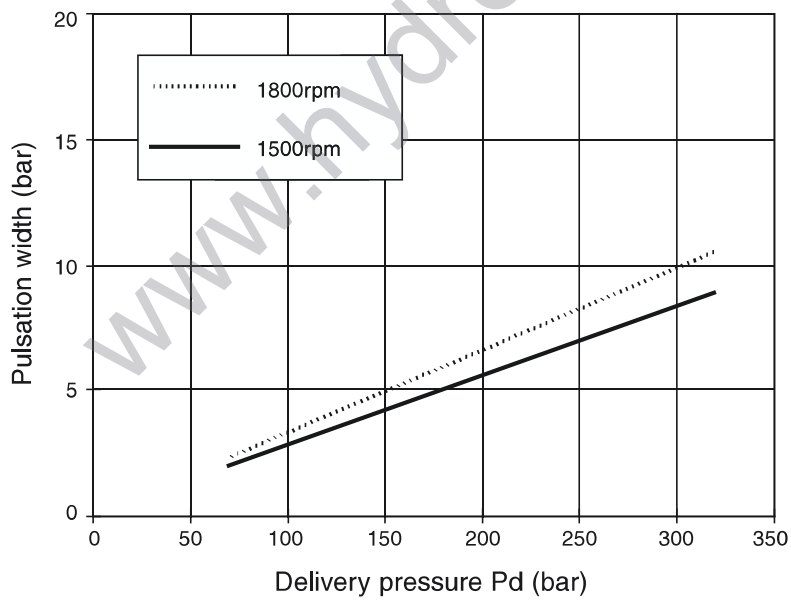

Pressure pulsation (continued)

K3VL200 pulsation graph

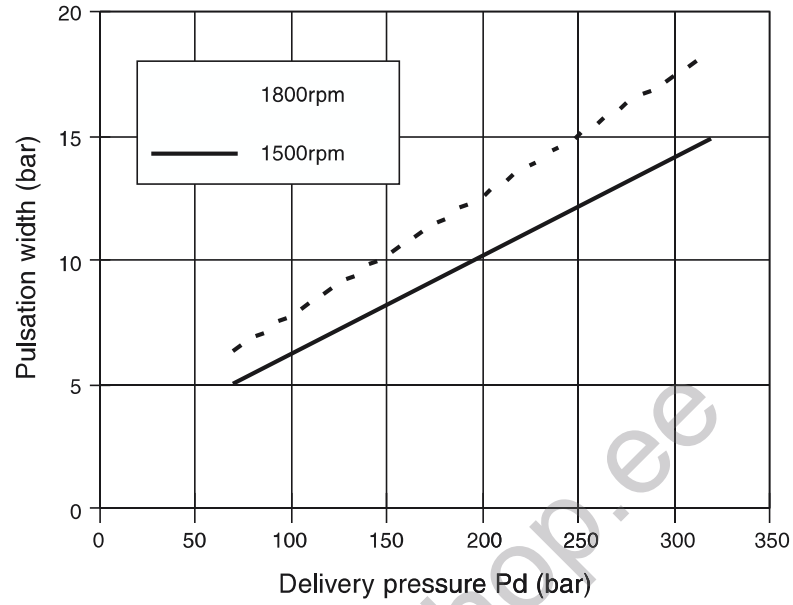


www.hydroshop.ie

Bearing Life (Full Displacement)


K3VL45

Note: Service and other life factors have unity value

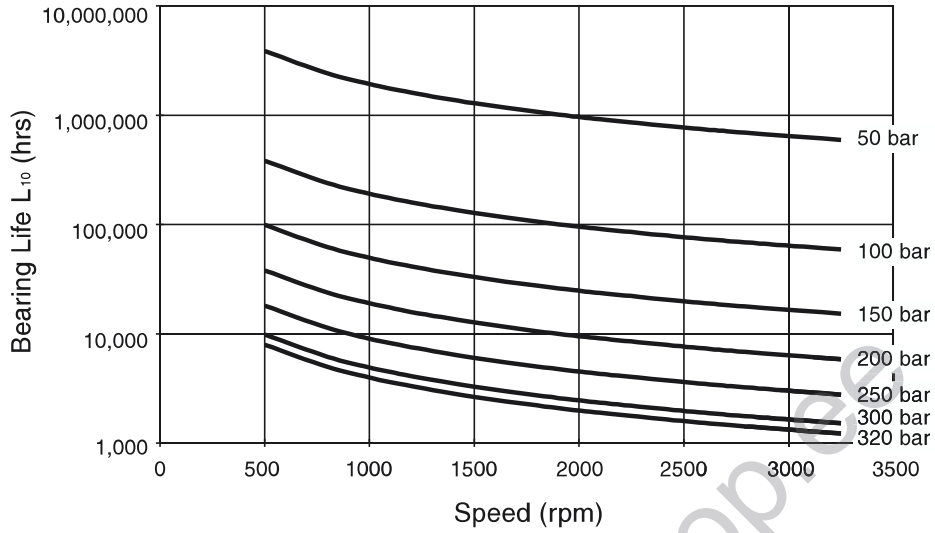

K3VL80


Note: Service and other life factors have unity value

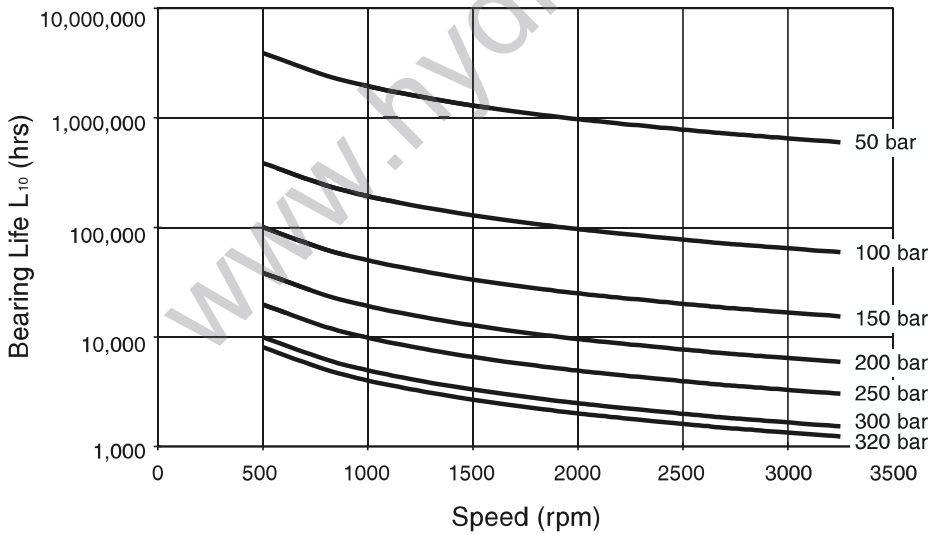

Bearing Life (Full Displacement) (continued)


K3VL112

Note: Service and other life factors have unity value

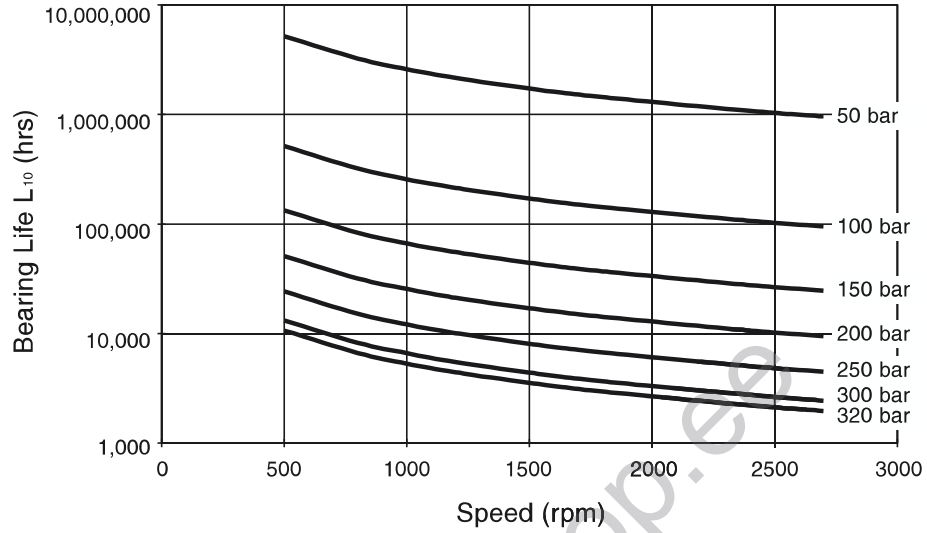

K3VL140


Note: Service and other life factors have unity value

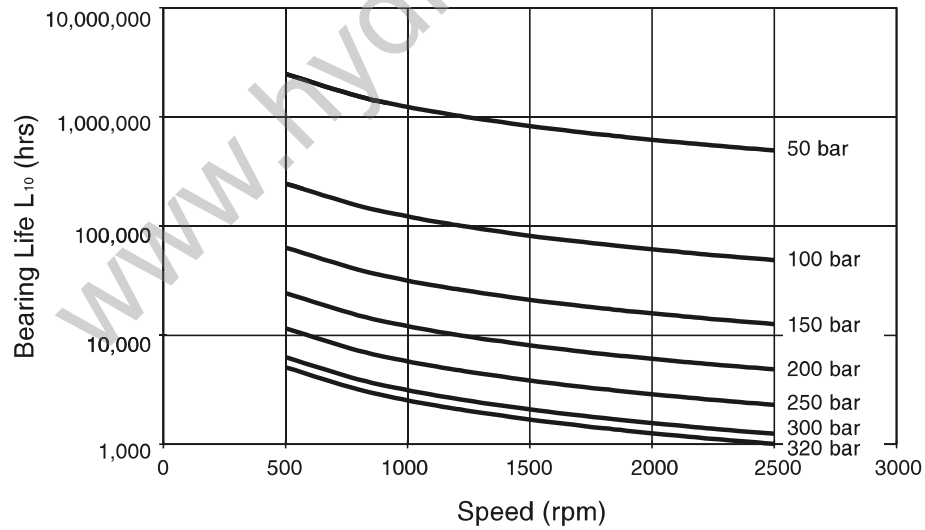

Bearing Life (Full Displacement) (continued)

K3VL200

Note: Service and other life factors have unity value

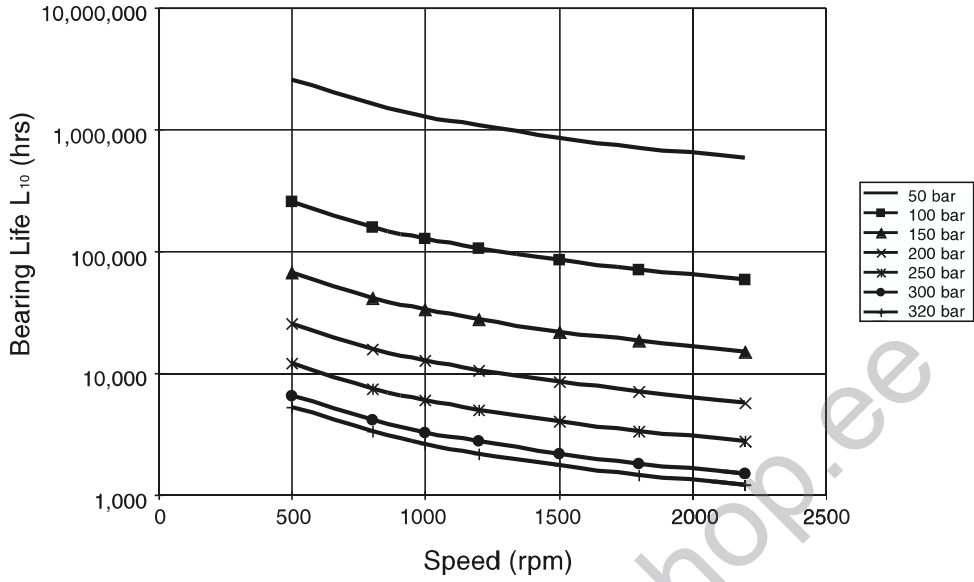


www.hydroshop.ie



Bearing Life (Industrial situation)


K3VL45

Note: Service and other life factors have unity value

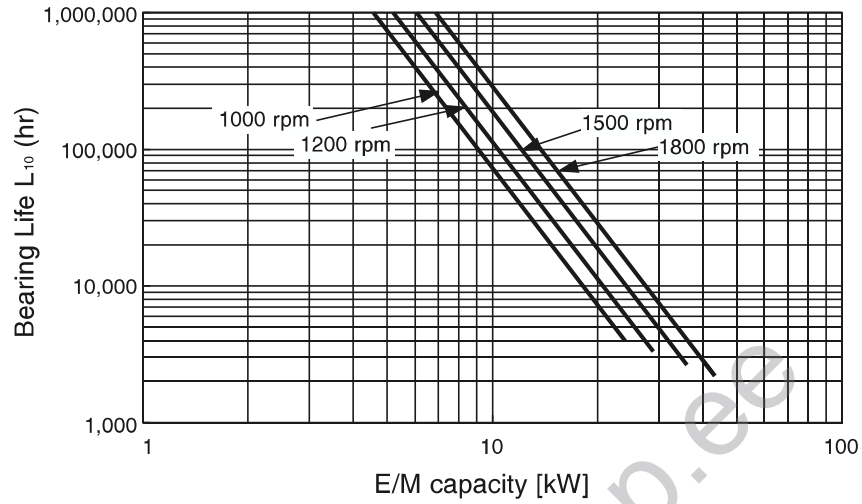

K3VL80


Note: Service and other life factors have unity value

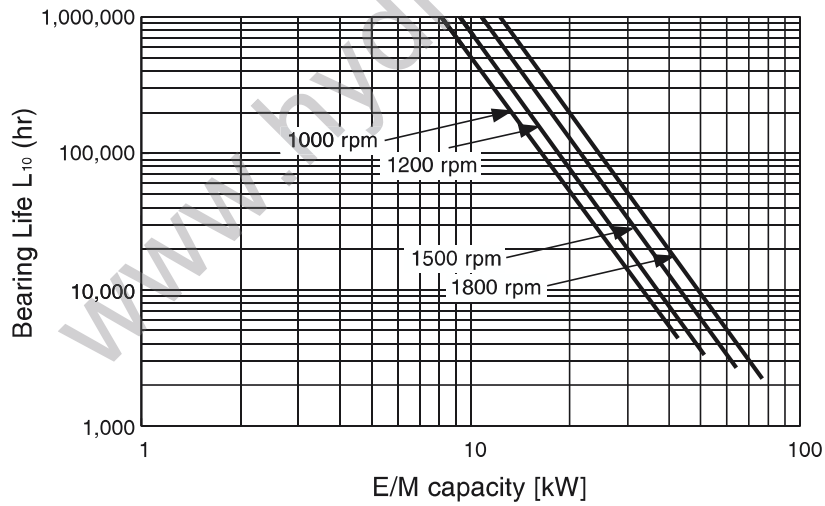

Bearing Life (Industrial Situation) (continued)



K3VL112

Note: Service and other life factors have unity value

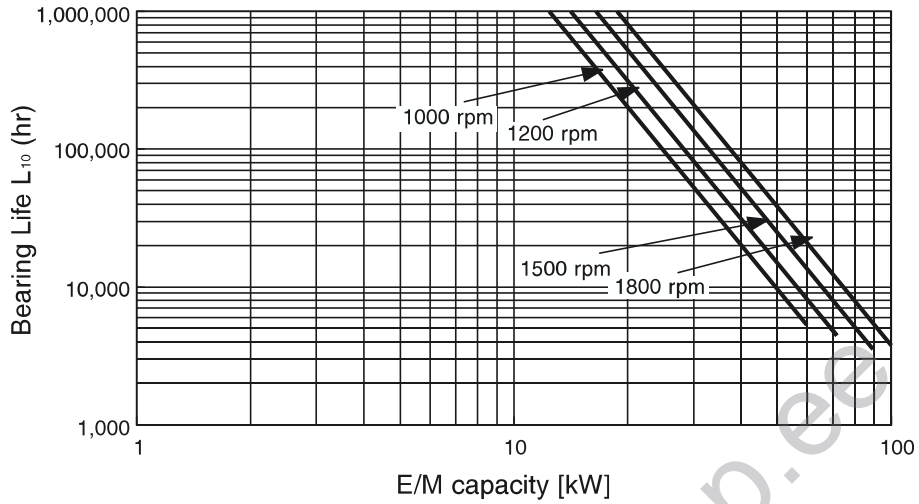

K3VL140


Note: Service and other life factors have unity value

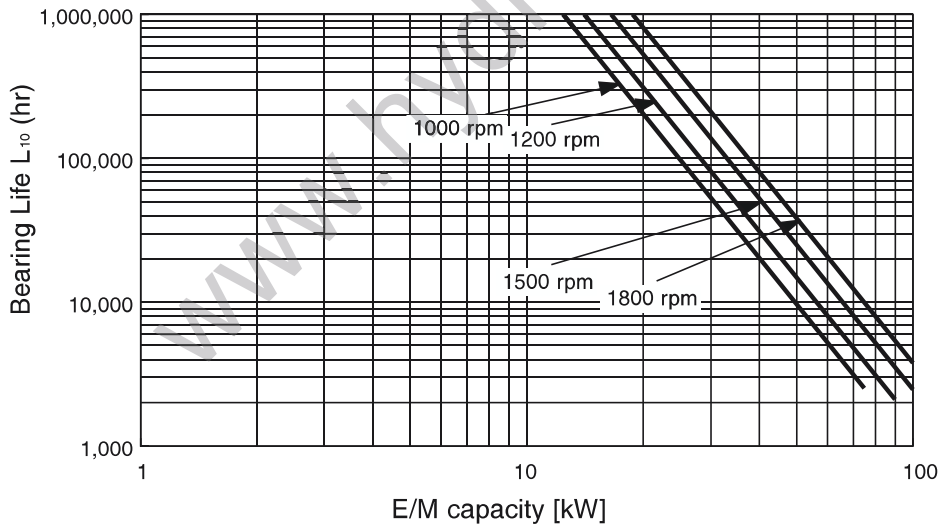

Bearing Life (Industrial Situation) (continued)

K3VL200


Note: Service and other life factors have unity value

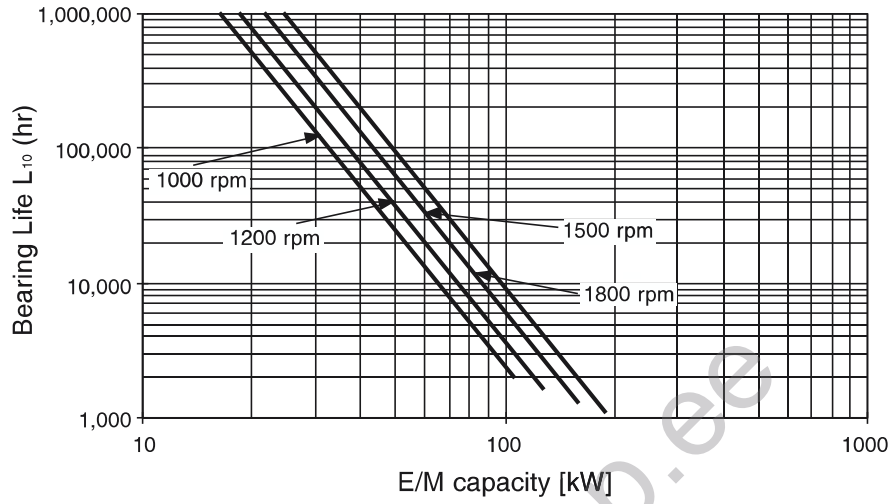

www.hydroshop.ee

Bearing Life (continued)

Bearing Life Correction Factors for Partial Displacement

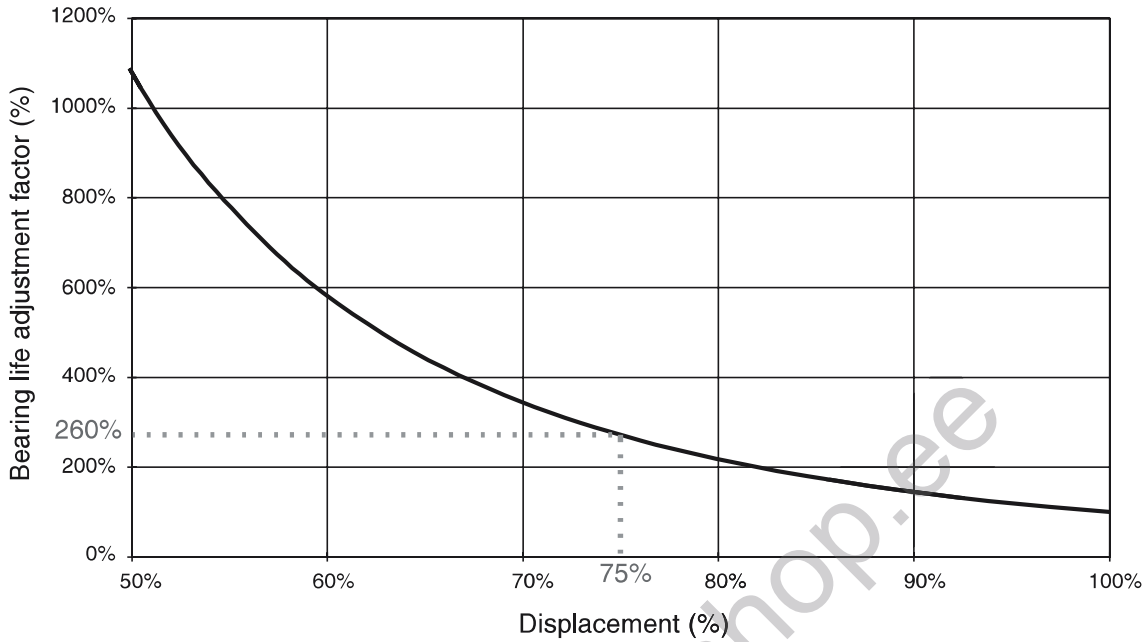

All bearing life curves on the previous pages refer to L10 life at full displacement. The foregoing curve is therefore to be used where duty cycle considerations require one to compute weighted life, which include partial displacement conditions.

For example as shown above if the bearing life at full displacement from the previous graphs was say 50,000 hours, then at the same operating condition with only 75% displacement the bearing life would be 260% of 50,000 hours or 130,000 hours.

www.hydropshop.ee




Radial Loading Capacity

No axial shaft loading possible

Radial loading is achievable but in specific orientation:-


In addition because of the high bearing capacity of this front bearing, radial shaft loading can be allowed provided that its orientation is such that it is this front bearing that takes the additional load (See diagram below and the bearing life and radial loading curves).

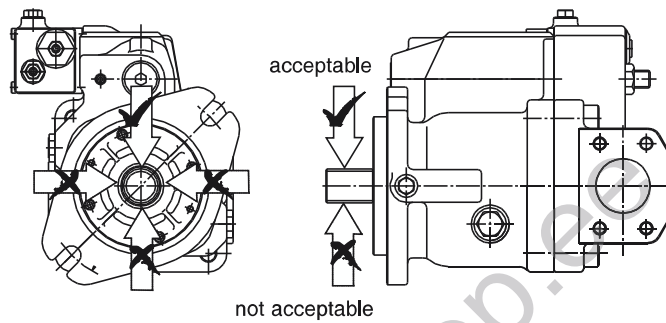


www.hydroshop.com

Radial Loading Capacity (continued)

K3VL45 Radial Loading Capacity

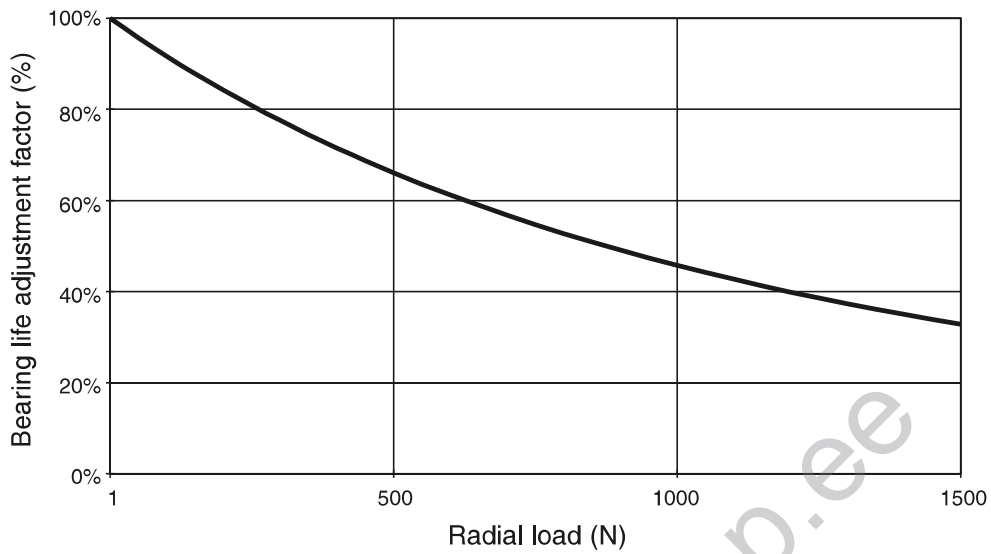


K3VL80 Radial Loading Capacity

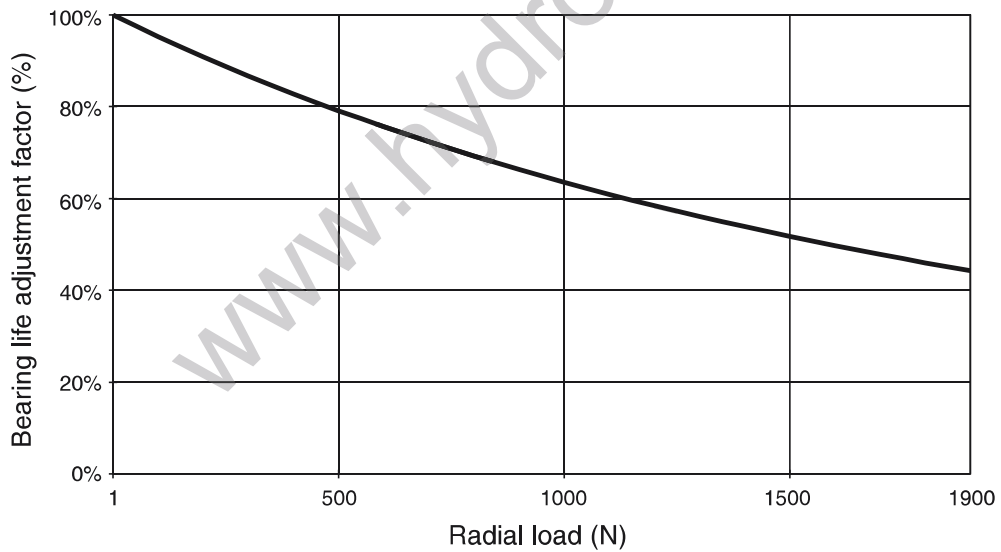


Radial Loading Capacity (continued)

K3VL112 Radial Loading Capacity

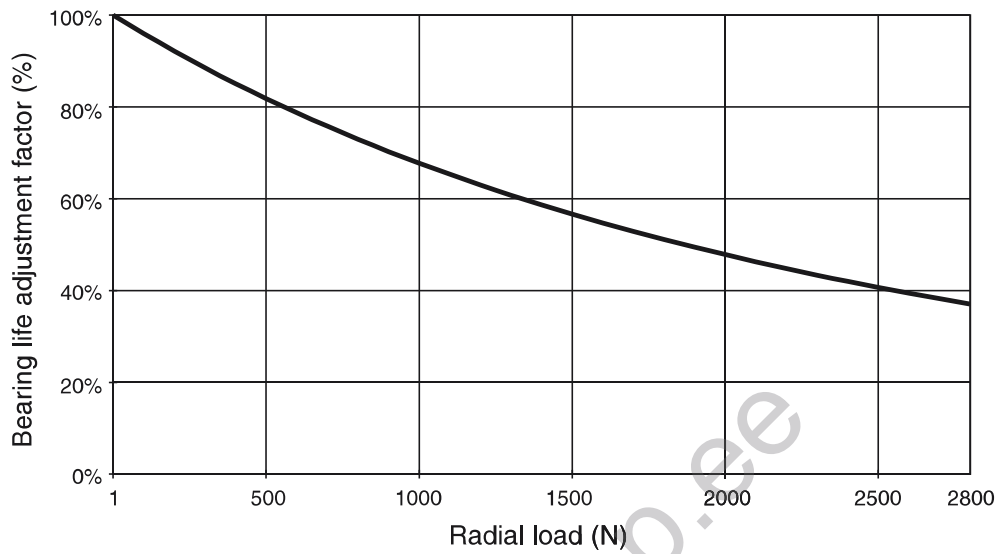


K3VL140 Radial Loading Capacity

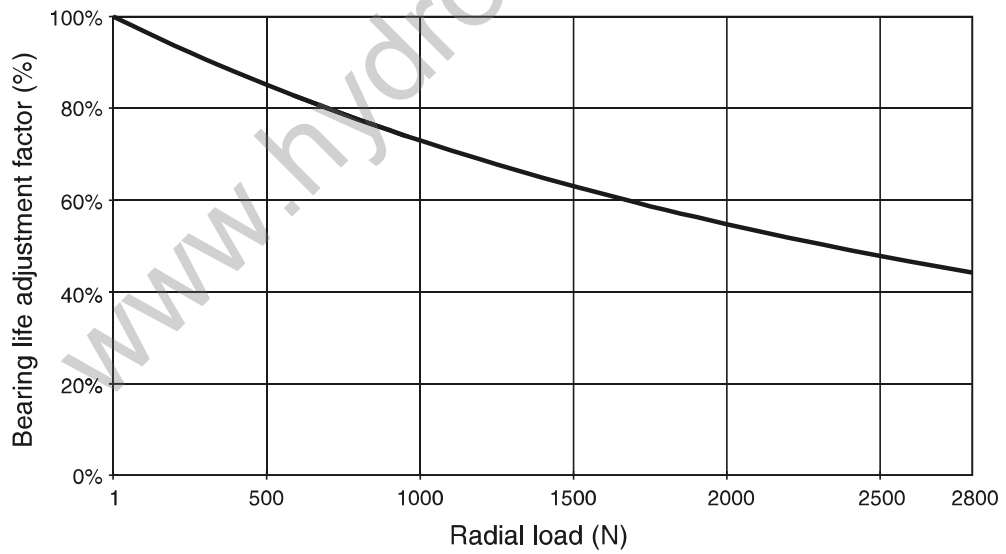

Radial Loading Capacity (continued)

K3VL200 Radial Loading Capacity

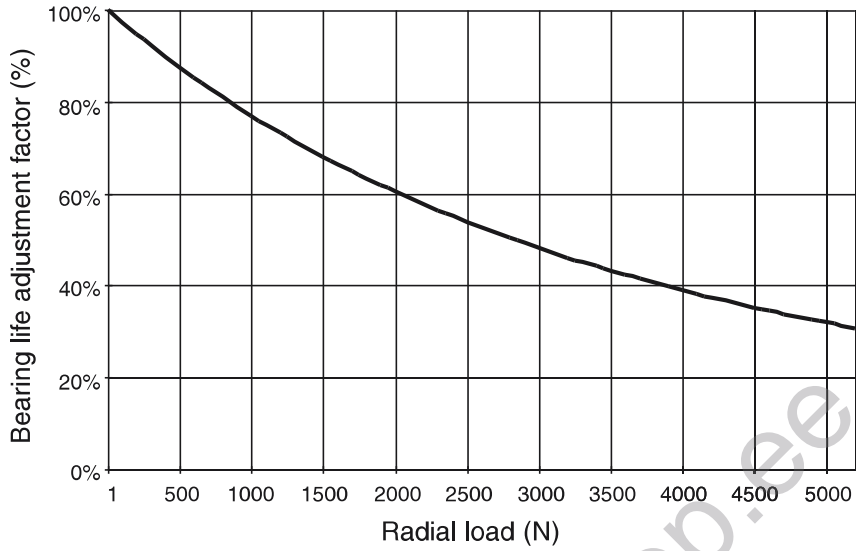

www.hydroshop.se



Model
K3VL

Page
32.64

Data Sheet
P-1002/01.06





Functional Description of Regulator

| Key to Hydraulic Circuit Annotations | |
|--------------------------------------|---|
| Annotation | Description |
| A ₁ | Main pump delivery |
| A ₂ | Auxiliary pump delivery |
| a ₁ | Gauge port main pump delivery |
| a ₂ | Gauge port auxiliary pump delivery |
| B ₂ | Gear pump suction |
| B ₁ | Main pump suction |
| b | Suction gauge port |
| Dr | Drain |
| Pi | Pilot pressure |
| Pc | Remote pilot port, Pressure compensator |
| Pi | Pilot port displacement control |
| P _L | Load sense port |
| Psv | Pressure assist port |
| Ps | Inlet pressure |

Note: The optional attached gear pump is recommended for all displacement control options. Hydraulic circuit diagrams illustrate the attached gear pump.

| Regulator Code | Control Curves | Hydraulic Circuit |
|---|----------------|-------------------|
| <p>LO/L1 Load Sense and Pressure Cut-off</p> <p>Pump displacement is controlled to match the flow requirement as a function of the system differential pressure (load pressure vs delivery pressure). In addition, there is a pressure cutoff function incorporated into the control. With the L1 option, the bleed-off orifice R4 is plugged.</p> | | |




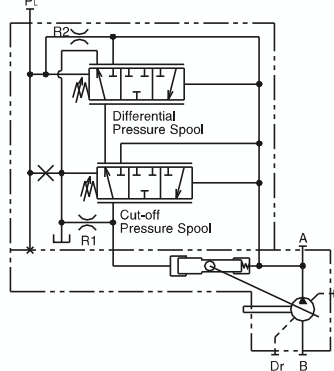
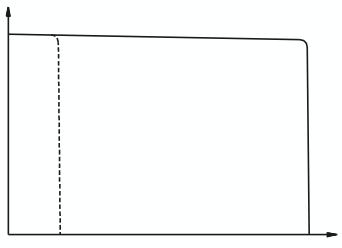
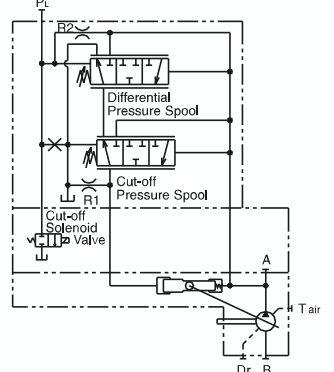
Functional Description of Regulator (continued)
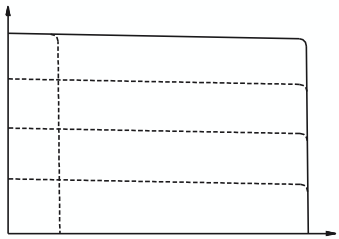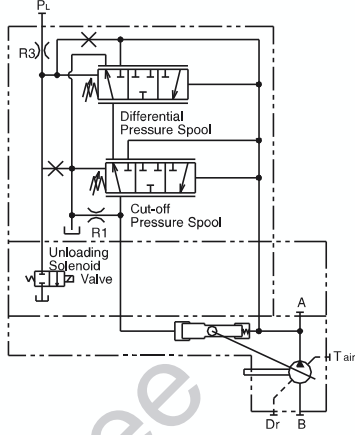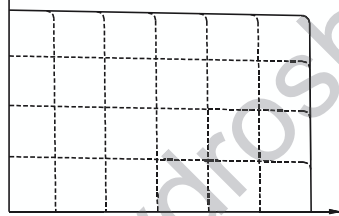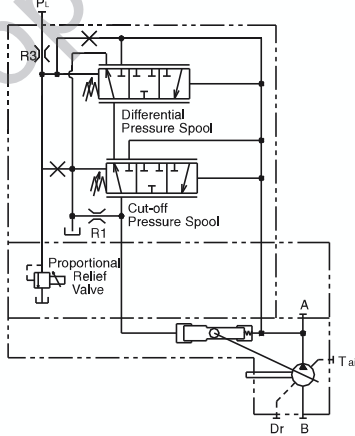
| Regulator Code | Control Curves | Hydraulic Circuit |
|--|--|---|
| <p>LN Load Sense and Pressure Cut-off with Integrated Unloading Valve</p> <p>An integrated unloading valve is sandwiched between the Load Sense regulator and pump to effectively de-stroke the swash-plate when an electric signal is provided.</p> |  |  |
| <p>LV Load Sense and Pressure Cut-off with Integrated Proportional Relief Valve</p> <p>An integrated proportional relief valve is sandwiched between the Load Sense regulator and pump to control the maximum pressure setting by varying an electric signal to the valve.</p> <p>A separate amplifier is required.</p> |  |  |





www.hydroshop.ee



Functional Description of Regulator (continued)



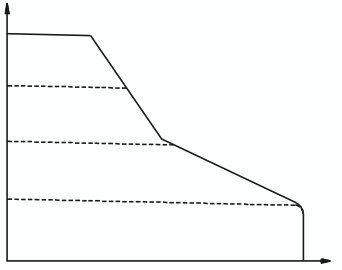
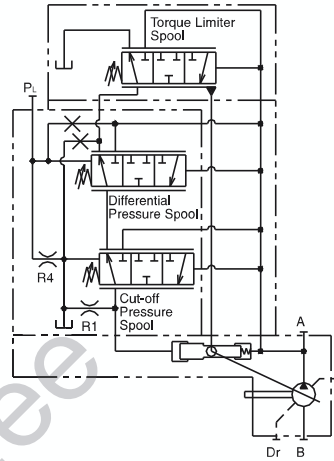
| Regulator Code | Control Curves | Hydraulic Circuit |
|--|--|---|
| <p>L0/L1 Load Sense and Pressure Cut-off with Torque Limiting</p> <p>L0/L1 control functions as previously noted.</p> <p>In response to a rise in delivery pressure the swashplate angle is decreased, restricting the input torque. This regulator prevents excessive load against the prime mover.</p> <p>The torque limit control module is comprised of two springs that oppose the spool force generated by the system pressure. By turning an outer and inner spring adjustment screw, the appropriate input torque limit can be set.</p> |  |  |
| <p>PO Pressure Cut-off</p> <p>As system pressure rises to the cut-off setting, the swashplate de-strokes to prevent the system pressure from exceeding the compensator setting. It is imperative that a safety relief valve be installed in the system.</p> <p>Note: By connecting the Pc port to a remote pressure control, variable pump pressure control can be achieved.</p> |  |  |
| <p>PN Pressure Cut-off with Integrated Unloading Valve</p> <p>An integrated unloading valve is sandwiched between the Pressure Cut-off regulator and pump to effectively de-stroke the swashplate when an electric signal is provided.</p> |  |  |

Functional Description of Regulator (continued)
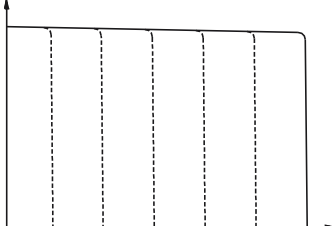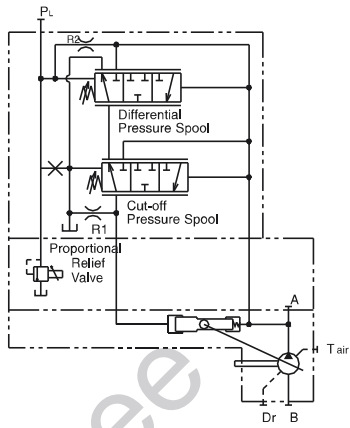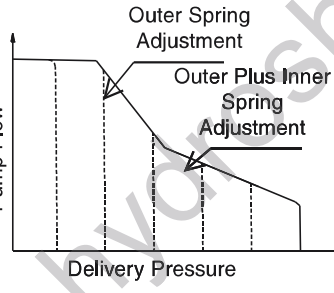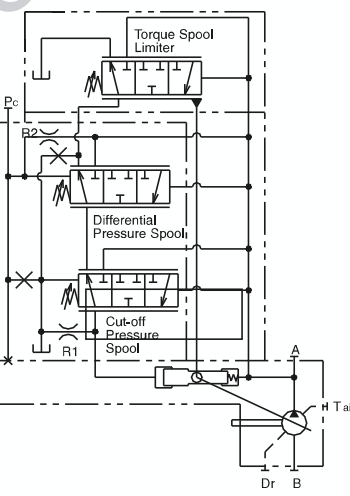
| Regulator Code | Control Curves | Hydraulic Circuit |
|---|--|---|
| <p>PV Pressure Cut-off with Integrated Proportional Relief Valve</p> <p>An integrated proportional relief valve is sandwiched between the Pressure Cut-off regulator and the pump to control the maximum pressure setting by varying an electric signal to the valve.</p> <p>A separate amplifier is required.</p> |  |  |
| <p>P0/1 Pressure Cut-off with Torque Limiting</p> <p>P0/P1 control functions as previously noted. In response to a rise in delivery pressure the swashplate angle is reduced, restricting the input torque. This regulator prevents excessive load against the prime mover.</p> <p>The torque limit control module is comprised of two springs that oppose the spool force generated by the system pressure. By turning an outer and inner spring adjustment screw, the appropriate input torque limit can be set.</p> <p>Note: By connecting the Pc port to a remote pressure control, variable pump pressure control can be achieved as indicated below.</p> |  |  |



Functional Description of Regulator (continued)
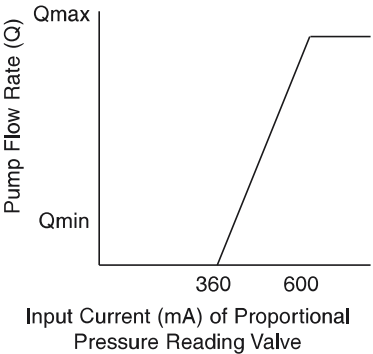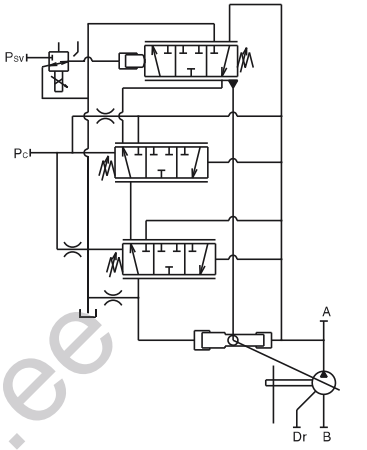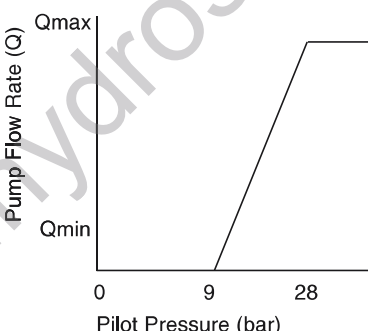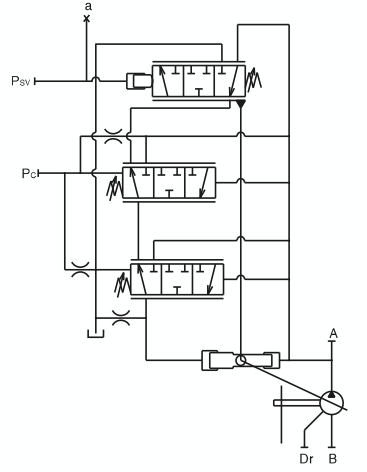
| Regulator Code | Control Curves | Hydraulic Circuit |
|--|--|---|
| <p>/1-E0 Electrical Displacement Control</p> <p>Varying the input current signal to the pump controller's electronic proportional pressure reducing valve (PPRV) allows the user to control the pump displacement. As the current signal to the PPRV increases, the pump displacement increases proportionally.</p> <p>Note: An external pressure supply of 40 bar is required at the PSV Port (50bar max).</p> |  |  |
| <p>/1-Q0 Pilot Operated Displacement Control</p> <p>Varying the input pressure signal to the PSV port allows the user to control the pump displacement. As the pressure signal to the PSV increases, the pump displacement increases proportionally.</p> |  |  |

www.hydroshop.ee



Functional Description of Regulator (continued)

| Regulator Code | Hydraulic circuit |
|---|-------------------|
| <p>Parallel control (Without torque limiter) /1-PP Parallel pressure compensation control</p> <p>As system pressure rises to the Cut-off setting, the swashplate de-strokes to prevent the system pressure exceeding the compensator setting. It is imperative that a safety relief valve be installed in the system.</p> <p>Note: By connecting the Pc ports together multiple pumps in parallel operation is achieved.</p> | |

www.hydroshop.com



Model
K3VL

Page
38.64

Data Sheet
P-1002/01.06

Torque Limiter Settings

The following tabulations show the power limitation at various electric motor speeds for a specific pump. When selecting a control setting please ensure that the power limitation of a particularly sized electric motor to your national standard is not exceeded.


| 970 rpm | | | | |
|------------|-----------------|----|-----|-----|
| Power (KW) | Pump Frame Size | | | |
| | 45 | 80 | 112 | 140 |
| 5.5 | L3 | | | |
| 7.5 | L1 | L6 | | |
| 11 | M1 | L2 | | |
| 15 | H3 | M4 | L3 | L6 |
| 18.5 | | M1 | M4 | L3 |
| 22 | | H3 | M2 | L1 |
| 30 | | H1 | H4 | M2 |
| 37 | | | H2 | H4 |
| 45 | | | | H2 |

| 1150 rpm | | | | |
|------------|-----------------|----|-----|-----|
| Power (KW) | Pump Frame Size | | | |
| | 45 | 80 | 112 | 140 |
| 7.5 | L2 | | | |
| 11 | M3 | L4 | | |
| 15 | H4 | L1 | L4 | |
| 18.5 | H2 | M3 | L2 | L5 |
| 22 | | M1 | M4 | L3 |
| 30 | | H2 | M1 | M3 |
| 37 | | | H3 | M1 |
| 45 | | | H2 | H4 |
| 55 | | | | H2 |

| 1450 rpm | | | | |
|------------|-----------------|----|-----|-----|
| Power (KW) | Pump Frame Size | | | |
| | 45 | 80 | 112 | 140 |
| 7.5 | L4 | | | |
| 11 | L1 | L6 | | |
| 15 | M2 | L3 | | |
| 18.5 | H4 | L1 | L4 | |
| 22 | H3 | M4 | L3 | L6 |
| 30 | | H4 | M3 | L2 |
| 37 | | H2 | M1 | M3 |
| 45 | | H1 | H4 | M2 |
| 55 | | | H2 | H4 |
| 75 | | | | H1 |

| 1750 rpm | | | | |
|------------|-----------------|----|-----|-----|
| Power (KW) | Pump Frame Size | | | |
| | 45 | 80 | 112 | 140 |
| 11 | L2 | | | |
| 15 | M4 | L5 | | |
| 18.5 | M2 | L3 | | |
| 22 | H4 | L1 | L4 | |
| 30 | H1 | M2 | L1 | L4 |
| 37 | | H4 | M3 | L2 |
| 45 | | H2 | M1 | M3 |
| 55 | | H1 | H4 | M2 |
| 75 | | | H1 | H3 |
| 90 | | | | H1 |

| K3VL200 | | | | |
|---------|-----|------|------|------|
| KW | 970 | 1150 | 1450 | 1750 |
| 3.7 | | | | |
| 5.5 | | | | |
| 7.5 | | | | |
| 11 | | | | |
| 15 | | | | |
| 22 | L4 | | | |
| 30 | L2 | L3 | | |
| 37 | M3 | L1 | L3 | |
| 45 | M1 | M3 | L2 | L3 |
| 55 | H5 | M1 | M3 | L2 |
| 75 | H1 | H3 | H6 | M2 |
| 90 | | H1 | H4 | H6 |
| 110 | | | H2 | H4 |
| 132 | | | | H2 |

 = Exceeds SAE C Max Input Torque (400NM)




Installation

Recommended Pump Mounting


The pump should be mounted horizontally with the case drain piping initially rising above the level of the pump before continuing to the tank as shown in the illustration below. Do not connect the drain line to the suction line.

The uppermost drain port should be used and the drain piping should be equal or larger in size than the drain port to minimise pressure in the pump case. The pump case pressure should not exceed 1 bar as shown in the illustration below. (Peak pressure should never exceed 4 bar.)

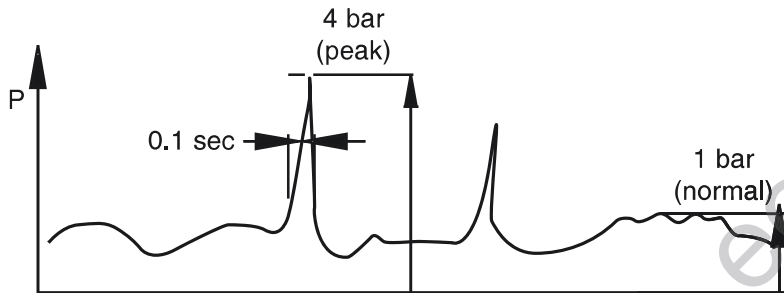


Mounting the Pump Above the Tank

Suction line

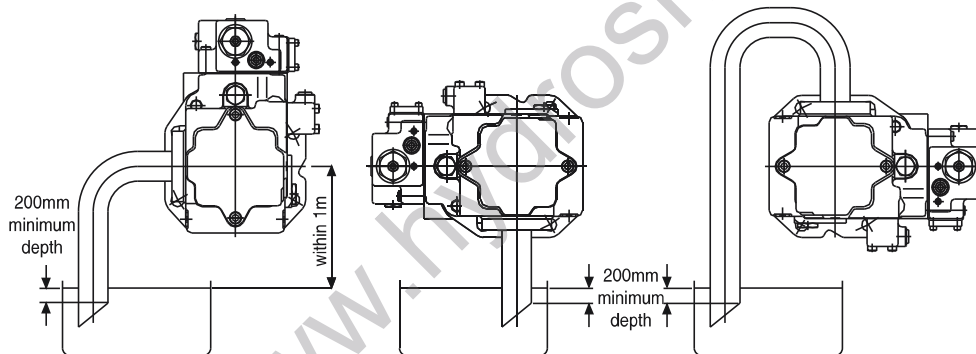

Drain line

"Goose neck" configuration is required, this prevents direct drop of oil level in the pump case.



Cautions

- A) Suction and drain pipes must be immersed by 200mm minimum from the lowest oil level under operating conditions.
- B) Height from the oil level to the centre of the shaft must be within 1m.
- C) The oil in the pump case must be refilled when the pump has not been operated for one month or longer.




Installation (continued)**Mounting the Pump Vertically (shaft up)**

For applications requiring vertical installation (shaft up) the pump must be provided with additional means to lubricate the front bearing. Do not use a standard pump for this type of application. (Mounting orientation "V" type should be used.)

The oil level in the tank should be higher than the pump-mounting flange as shown in illustration [a] below. If the oil level in the tank is lower than the pump mounting flange then forced lubrication is required through the air bleed port 1 ~ 2 l/min.

When installing the pump in the tank and submerged in the oil, open the drain port and air bleed port to provide adequate lubrication to the internal components.

When installing the pump outside the tank run piping for the drain and air bleed ports to tank (see illustration [c]). If the drain or air bleed piping rise above the level of oil (see illustration [b]) fill the lines with oil before operation.

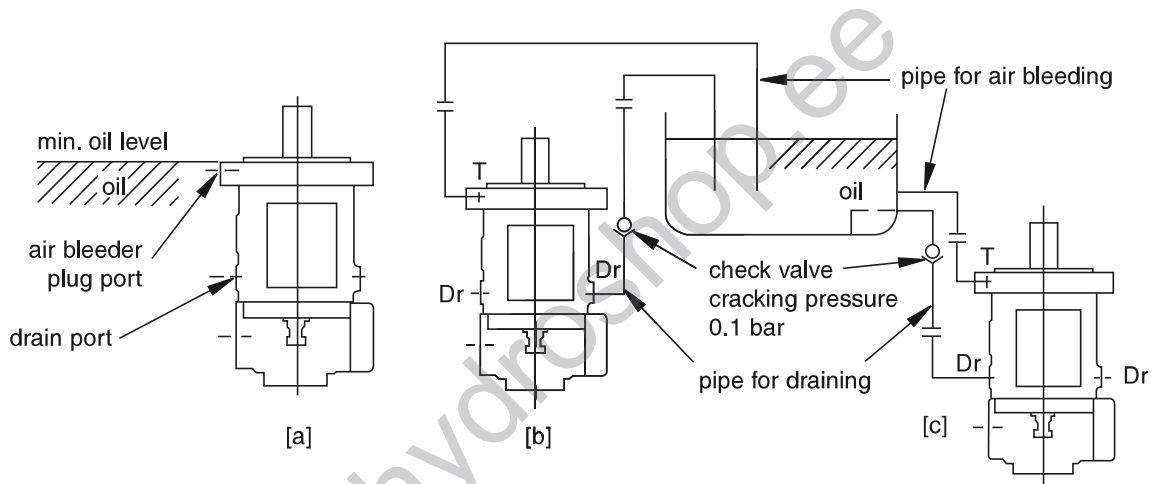

A check valve with cracking pressure of 0.1 bar should be fitted to the case drain line as shown. Recommended Kawasaki check valves are as follows: (refer to Kawasaki industrial valve information - data sheet C1001)



| Model | Recommended Kawasaki check valve |
|---------|----------------------------------|
| K3VL45 | C10G - 10/01-* |
| K3VL80 | C15G - 10/01-* |
| K3VL112 | C15G - 10/01-* |
| K3VL140 | C15G - 10/01-* |
| K3VL200 | C15G - 10/01-* |

Drive Shaft Coupling

Use a flexible coupling to connect the pump shaft to an engine flywheel or electric motor shaft. Alignment should be within 0.05mm TIR as shown in the illustration below.

Do not apply any radial or axial loading to the pump shaft. For applications where radial or side loads exist please contact Kawasaki Precision Machinery (UK) Ltd. for recommendations.


Do not force the coupling on or off the pump shaft. Use the threaded hole in the end of the pump shaft to fix or remove the coupling.

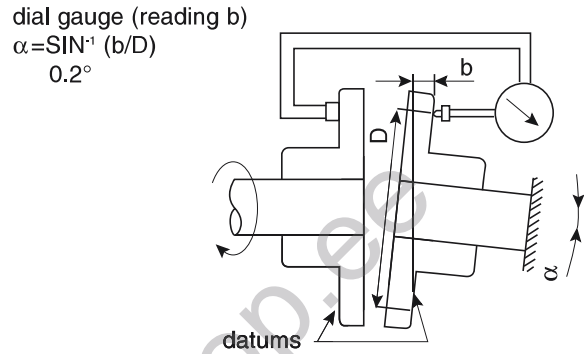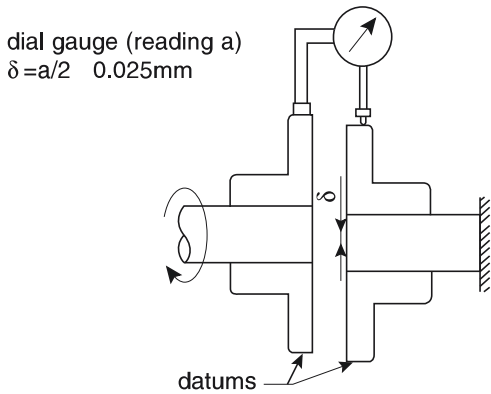

For engine drives a split type pinch bolt drive flange and flexible coupling is recommended.

Through Drive Limitations

Apart from predefined maximum throughput limitations, one must also ensure that to prevent a possible excessive bending moment occurring that the maximum combined bending moment of the combination is not exceeded as determined in the following expression

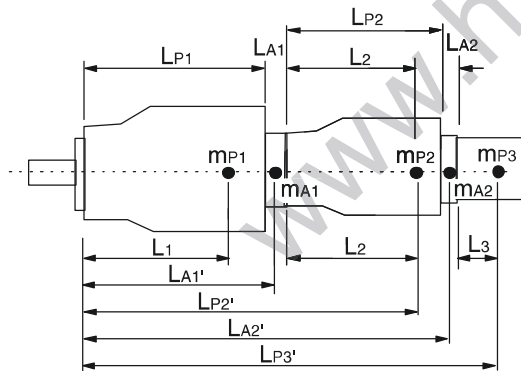

- MPX = mass of pump [kg]
- LPX = length of pump [mm]
- LX = distance of CofG from pump mounting face [mm]
- MAX = mass of adaptor kit [kg]
- LAX = width of adaptor kit [mm]

$$\text{Bending Moment} = \frac{((L_1 \cdot m_{P1}) + (L_{A1} \cdot m_{A1}) + (L_{P2} \cdot m_{P2}) + (L_{A2} \cdot m_{A2}) + L_{P3} \cdot m_{P3}) + \dots}{102} [\text{Nm}]$$

$$+ \frac{((L_1 \cdot m_{P1}) + (L_{P1} + (L_{A1}/2)) \cdot m_{A1} + (L_{P1} + L_{A1} + L_2) \cdot m_{P2} + (L_{P1} + L_{A1} + L_{P2}(L_{A2}/2)) \cdot m_{A2} + (L_{P1} + L_{A1} + L_{P2} + L_{A2}) \cdot m_{P3} + \dots)}{102}$$



Through Drive Limitations (continued)**Pump overall length [mm] (Lp)**

| Pump Size | Single Pump | Stock Pump |
|-----------|-------------|------------|
| | Type "0" | Type "S" |
| 45/60 | 244 | 244 |
| 80 | 272 | 272 |
| 112/140 | 308 | 308 |
| 200 | 359 | 359 |

| Pump Size | Maximum Permissible Bending Moment (Nm) |
|-----------|---|
| 45/60 | 137 |
| 80 | 244 |
| 112/140 | 462 |
| 200 | 930 |

Pump approximate weight [kg] (Mp)

| Pump Size | Without torque limiter | | With torque limiter | |
|-----------|------------------------|------------|---------------------|------------|
| | Single Pump | Stock Pump | Single Pump | Stock Pump |
| | Type "0" | Type "S" | Type "0" | Type "S" |
| 45/60 | 25 | 28 | 27 | 30 |
| 80 | 35 | 38 | 37 | 40 |
| 112/140 | 65 | 69 | 67 | 71 |
| 200 | 95 | 103 | 97 | 105 |

| Adaptor Kits weight (Ma) & Width (La) | | | |
|---------------------------------------|----------------|--------------|-------------|
| Pump size | Adaptor Kit | Weight (Max) | Width (Lax) |
| 45 | SAE "A" | 0 | 0 |
| | SAE "B" & "BB" | 2 | 20 |
| 80 | SAE "A" | 0 | 0 |
| | SAE "B" & "BB" | 3 | 20 |
| | SAE "C" | 4 | 24.5 |
| 112 & 140 | SAE "A" | 0 | 0 |
| | SAE "B" & "BB" | 3 | 25 |
| | SAE "C" & "CC" | 5 | 30 |
| 200 | SAE "D" | 10 | 43 |
| | SAE "A" | 1 | 6 |
| | SAE "B" & "BB" | 8 | 25 |
| | SAE "C" & "CC" | 8 | 30 |
| | SAE "D" | 10 | 38 |
| | SAE "E" | 15 | 38 |

Pump CofG from mount [mm] (L)

| Pump Size | Single Pump | Stock Pump |
|-----------|-------------|------------|
| | Type "0" | Type "S" |
| 45/60 | 120 | 120 |
| 80 | 130 | 130 |
| 112/140 | 150 | 150 |
| 200 | 190 | 190 |

Electrical Displacement Control Application

The standard minimum flow setting for the K3VL pump is 0.5-3.0% of the maximum pump delivery. The pumps minimum displacement stop can be modified if a greater minimum flow rate is required. In order for the electronic displacement control to function, a minimum pilot pressure for 40 bar must be supplied to the Psv port on the regulator. A gear pump attached to the rear of the K3VL pump or an external pressure source can be used to provide the required pilot pressure.

Proportional Pressure Reducing Valve Specification

| | | | |
|----------------------------|---|----------------------------|---|
| Maximum Pilot Pressure | : | 50 bar | If higher pressure required contact KPM |
| Max Flow | : | 10 l/min | |
| Hydraulic oil | : | Mineral oil | |
| Oil temp range | : | -20~+90°C | |
| Viscosity range | : | 5~500 cst | |
| Allowable contamination | : | NAS grade 10 and below | |
| Electrical specifications, | | | |
| Rated current | : | 700 mA | |
| Recommended dither | : | 80 Hz / 200 mAp-p | |
| Coil resistance | : | 17.5 (at 20°C) | |
| Ambient temperature range | : | -30~+80°C | |
| Water resistance | : | According to JIS D 0203 S2 | |




Unit Dimensions

K3VL45 Installation

K3VL45 with Cut-Off / Load Sense Control
& Torque Limit Module (Clockwise Rotation)

Note
for counter clockwise rotation,
the suction port "B" and the
delivery port "A" are reversed

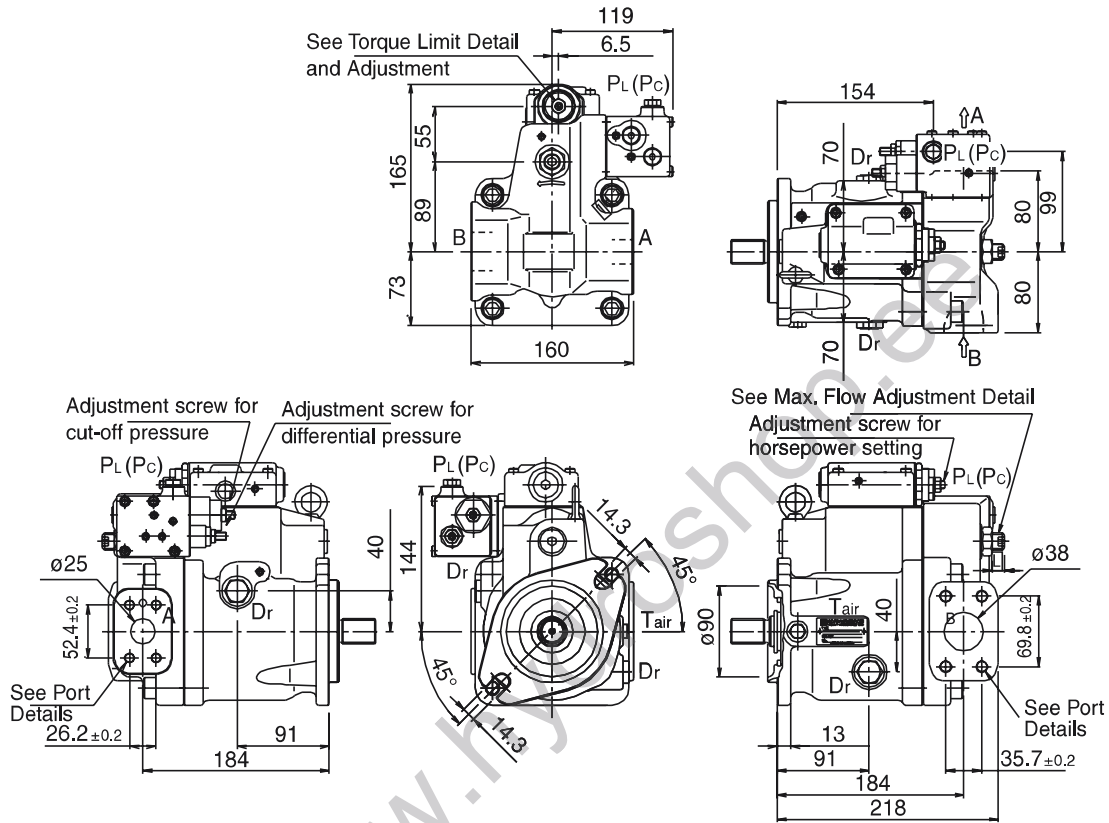


www.kawasakishop.com




Unit Dimensions (continued)

K3VL45 Mounting Flange and Shaft Options


SAE Type

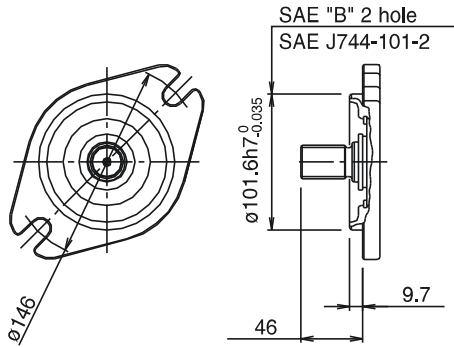


ISO Type

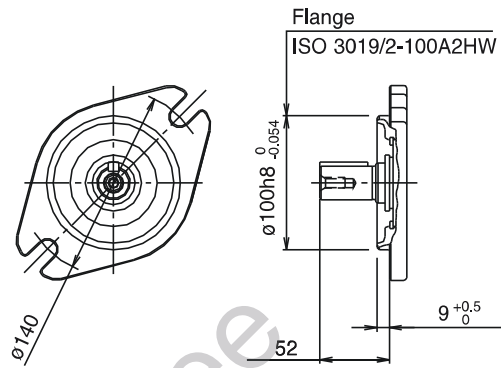


SAE Spline Shaft

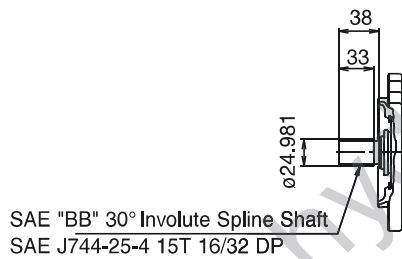

SAE Straight Shaft




ISO Straight Shaft



Unit Dimensions (continued)

K3VL45 Rear Port

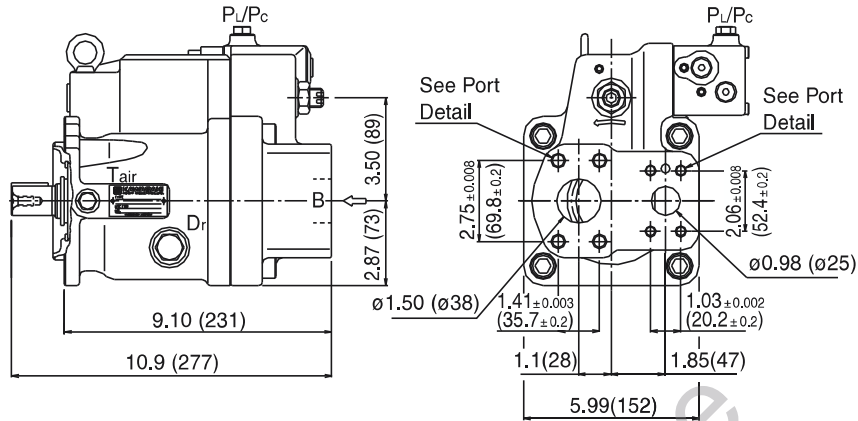

K3VL45 Porting Details

Main SAE Flanged Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) | Flange Threads |
|--|---------------|---|------------------------|---------------------|
| UNF Threaded Version ("S" in position 9 of model code) | | | | |
| A | Delivery Port | SAE J518C Std pressure (code 61) 1" | 57 | 3/8-16UNC-2B x 18mm |
| B | Suction Port | SAE J518C Std pressure (code 61) 1 1/2" | 98 | 1/2-13UNC-2B x 22mm |

Metric Version ("M" in position 9 of model code)

| | | | | |
|---|---------------|---|----|----------|
| A | Delivery Port | SAE J518C Std pressure (code 61) 1" | 57 | M10 x 17 |
| B | Suction Port | SAE J518C Std pressure (code 61) 1 1/2" | 98 | M12 x 20 |

Auxiliary Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) |
|---|--|---|------------------------|
| SAE Version ("S", "K", "U" or "T" in position 8 of model) | | | |
| Dr | Drain Port (x2) | SAE J1926/1 Straight thread O ring boss 1/2" OD Tube 3/4-16UNF-2B | 98 |
| PL PC | Load Sensing Port Pressure Control Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |
| Tair | Air Bleeder Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |

ISO Version ("M" in position 8 of model code)


| | | | |
|----------|--|--------------------|----|
| Dr | Drain Port (x2) | M22 x 1.5 DIN 3852 | 98 |
| PL PC | Load Sensing Port Pressure Control Port | M14 x 1.5 DIN 3852 | 25 |
| Tair | Air Bleeder Port | M14 x 1.5 DIN 3852 | 25 |




Unit Dimensions (continued)

K3VL45 Through Drive Options


Through Drive "A"

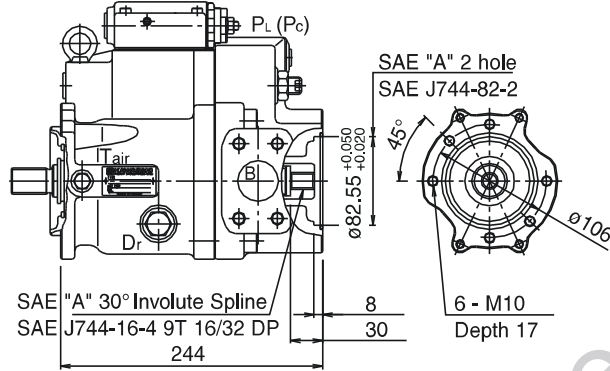

Through Drive "B"

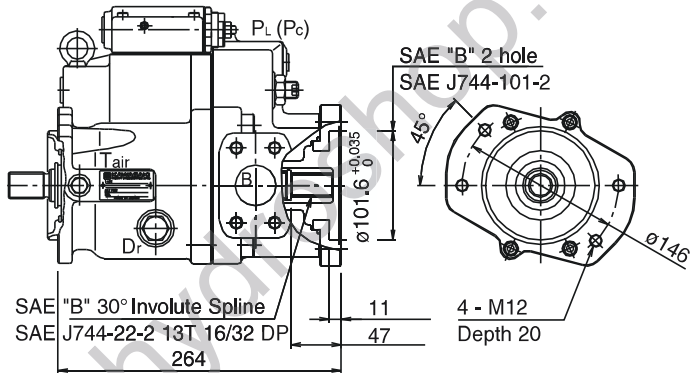


Through Drive "BB"

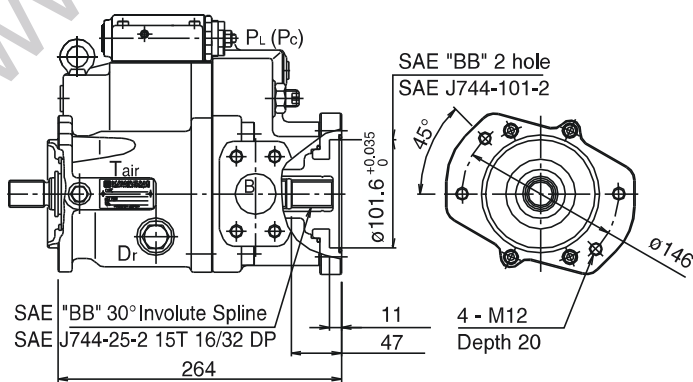


Unit Dimensions (continued)


K3VL45 Adaptor Kits



Cover Kit



SAE "A"
T/D Kit



SAE "B" & "BB"
T/D Kit

| No | Part Name | QTY | Cover Kit | SAE "A" T/D Kit | SAE "B" T/D Kit | SAE "BB" T/D Kit |
|-----|---------------|-----|--------------|--------------------|--------------------|---------------------|
| — | T/D Kit | | 29L8TN | 29L4TA | 29L4TB | 29L4T2 |
| 743 | O-Ring | 1 | 00RBG85 | 00RBG85 | 00RBG85 | 00RBG85 |
| 742 | O-Ring | 1 | — | — | 00RBG105 | 00RBG105 |
| 415 | Screw Hex SHC | 4 | — | — | 0SBM825 | 0SBM825 |
| 402 | Screw Hex SHC | 2 | 0SBM1020 | — | — | — |
| 317 | Subplate | 1 | — | — | 2924750-0358 | 2924750-0358 |
| 314 | Cover | 1 | 2923150-0316 | — | — | — |
| 116 | Coupling | 1 | — | 2903150-0264 | 2903150-0265 | 2903150-0266 |

www.hydroshop.com




Unit Dimensions (continued)

K3VL80 Installation

K3VL80 with Cut-Off / Load Sense Control
& Torque Limit Module (Clockwise Rotation)


Note
for counter clockwise rotation,
the suction port "B" and the
delivery port "A" are reversed

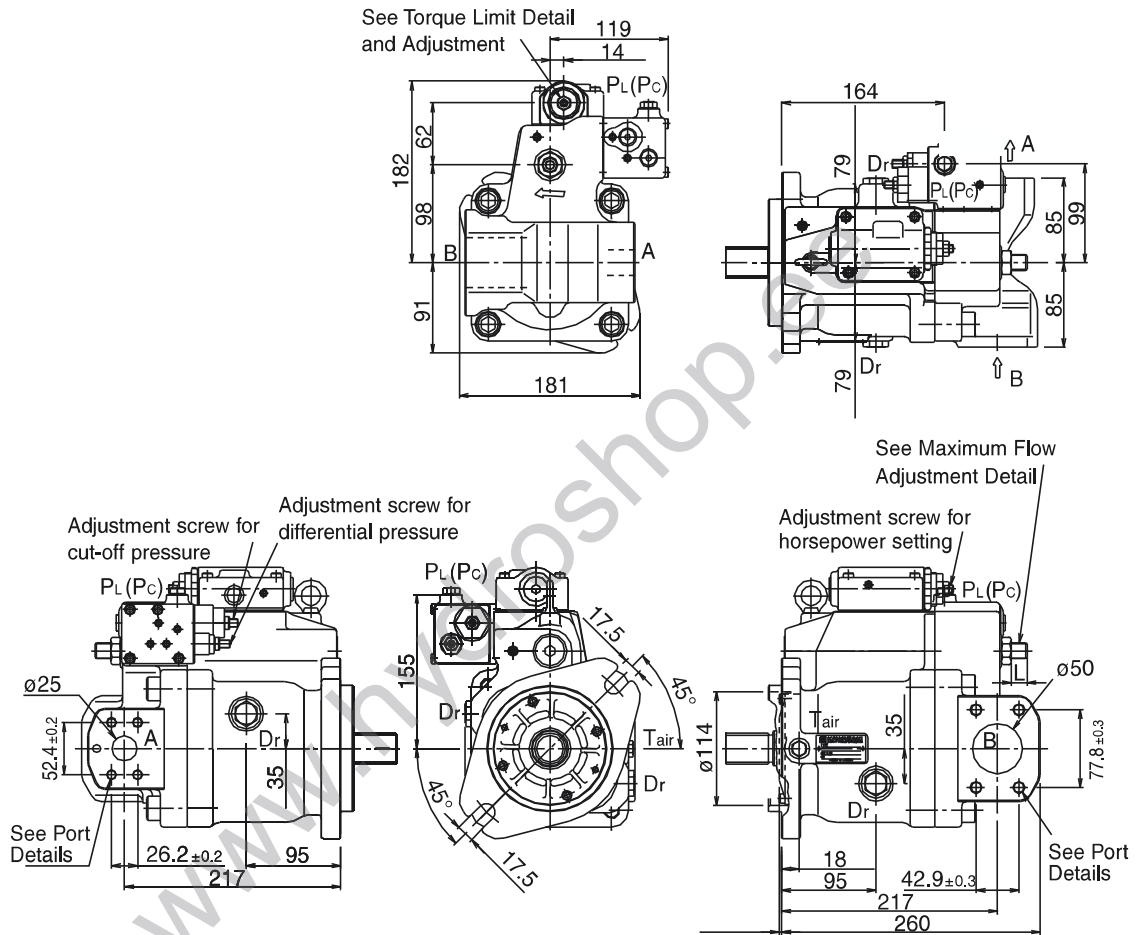


Unit Dimensions (continued)

K3VL80 Mounting Flange and Shaft Options


SAE Type

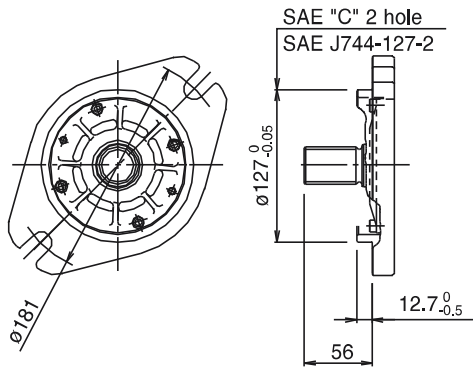


ISO Type

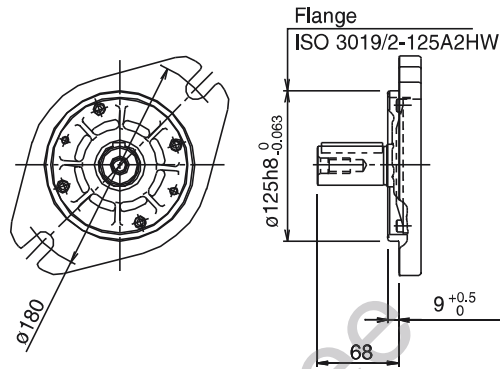


SAE Spline Shaft

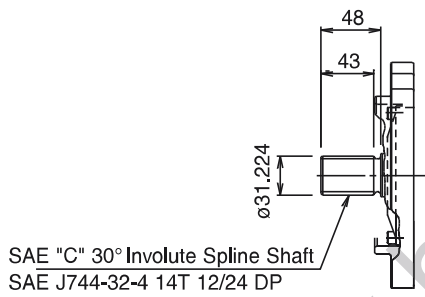

SAE Straight Shaft




ISO Straight Shaft

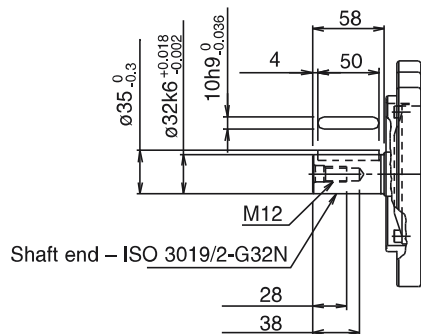

Unit Dimensions (continued)

K3VL80 Rear Port Option

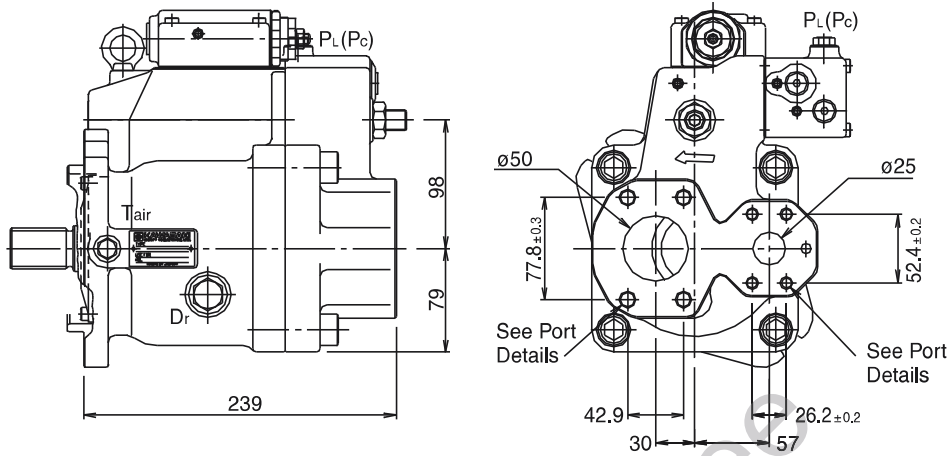

K3VL80 Porting Details

Main SAE Flanged Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) | Flange Threads |
|------|-----------|-----------|------------------------|----------------|
|------|-----------|-----------|------------------------|----------------|

UNF Threaded Version ("S" in position 9 of model code)

| | | | | |
|---|---------------|-------------------------------------|----|---------------------|
| A | Delivery Port | SAE J518C Std pressure (code 61) 1" | 57 | 3/8-16UNC-2B x 18mm |
| B | Suction Port | SAE J518C Std pressure (code 61) 2" | 98 | 1/2-13UNC-2B x 22mm |

Metric Version ("M" in position 9 of model code)

| | | | | |
|---|---------------|-------------------------------------|----|----------|
| A | Delivery Port | SAE J518C Std pressure (code 61) 1" | 57 | M10 x 17 |
| B | Suction Port | SAE J518C Std pressure (code 61) 2" | 98 | M12 x 20 |

Auxiliary Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) |
|------|-----------|-----------|------------------------|
|------|-----------|-----------|------------------------|

SAE Version ("S", "K", or "T" in position 8 of model)

| | | | |
|----------|--|---|----|
| Dr | Drain Port (x2) | SAE J1926/1 Straight thread O ring boss 1/2" OD Tube 3/4-16UNF-2B | 98 |
| PL PC | Load Sensing Port Pressure Control Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |
| Tair | Air Bleeder Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |


ISO Version ("M" in position 8 of model code)

| | | | |
|----------|--|--------------------|----|
| Dr | Drain Port (x2) | M22 x 1.5 DIN 3852 | 98 |
| PL PC | Load Sensing Port Pressure Control Port | M14 x 1.5 DIN 3852 | 25 |
| Tair | Air Bleeder Port | M14 x 1.5 DIN 3852 | 25 |


Unit Dimensions (continued)

K3VL80 Through Drive Options


Through Drive "A"

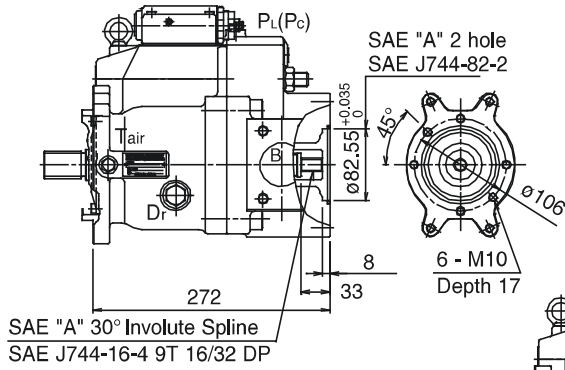


Through Drive "B"

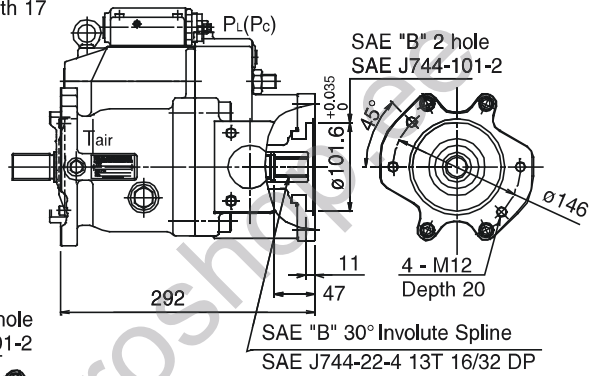

Through Drive "BB"

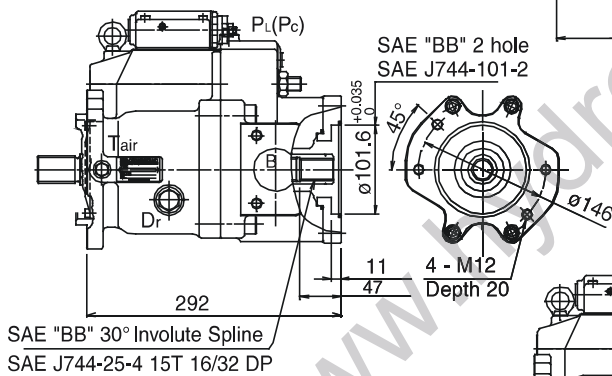


Through Drive "C"

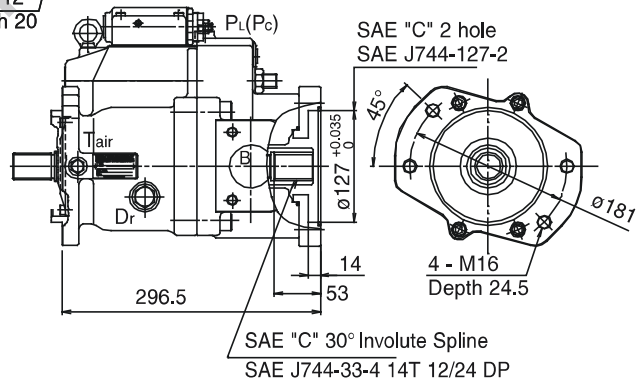


Unit Dimensions (continued)


K3VL80 Adaptor Kits



Cover Kit



SAE "A"
T/D Kit



SAE "B", "BB" & "C"
T/D Kit

| No | Part Name | QTY | Cover Kit | SAE "A" T/D Kit | SAE "B" T/D Kit | SAE "BB" T/D Kit | SAE "C" T/D Kit |
|-----|---------------|-----|--------------|--------------------|--------------------|---------------------|--------------------|
| — | T/D Kit | | 29L8TN | 29L8TA | 29L8TB | 29L8T2 | 29L8TC |
| 743 | O-Ring | 1 | 00RBG85 | 00RBG85 | 00RBG85 | 00RBG85 | 00RBG85 |
| 742 | O-Ring | 1 | — | — | 00RBG105 | 00RBG105 | 00RBG130 |
| 415 | Screw Hex SHC | 4 | — | — | 0SBM1025 | 0SBM1025 | 0SBM1030 |
| 402 | Screw Hex SHC | 2 | 0SBM1020 | — | — | — | — |
| 317 | Subplate | 1 | — | — | 2924750-0354 | 2924750-0354 | 2924750-0355 |
| 314 | Cover | 1 | 2923150-0316 | — | — | — | — |
| 116 | Coupling | 1 | — | 2903150-0241 | 2903150-0262 | 2903150-0267 | 2903150-0263 |

www.hydropedia.com







Unit Dimensions (continued)

K3VL112/140 Installation

K3VL112/140 with Cut-Off / Load Sense Control & Torque Limit Module (Clockwise Rotation)


Note
for counter clockwise rotation,
the suction port "B" and the
delivery port "A" are reversed

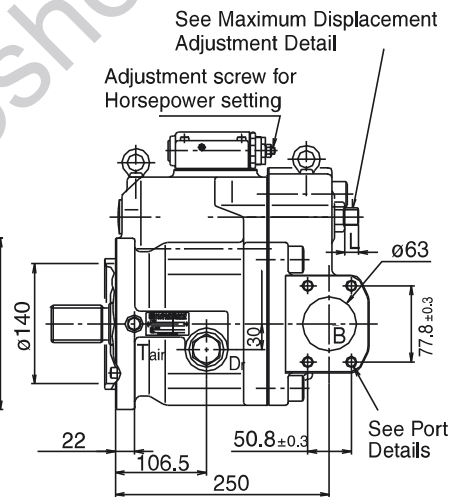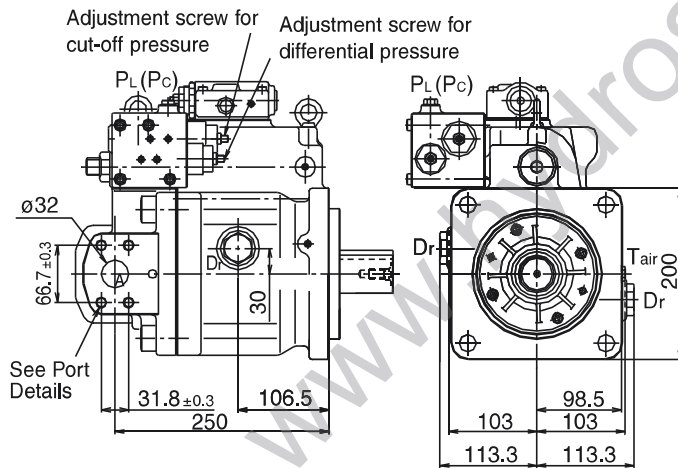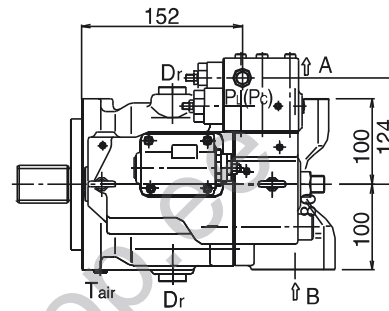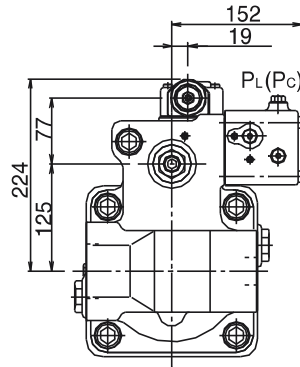


Unit Dimensions (continued)

K3VL112/140 (SAE D 4 BOLT) Mounting Flange & Shaft Options


SAE "D" Type

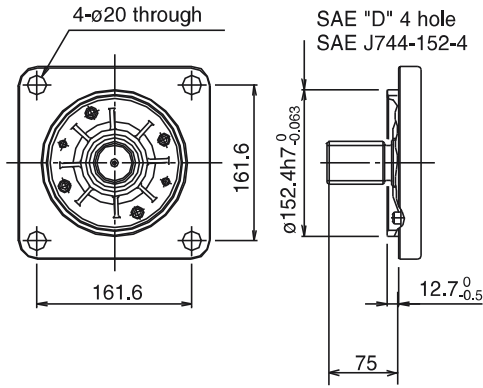


ISO Type

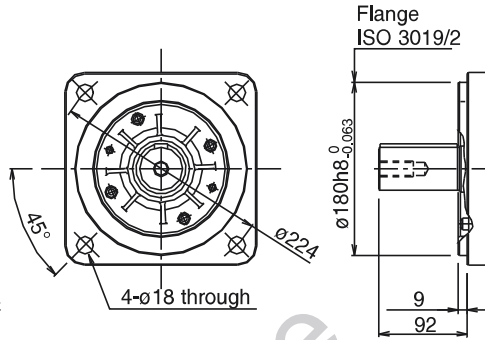


SAE Spline Shaft

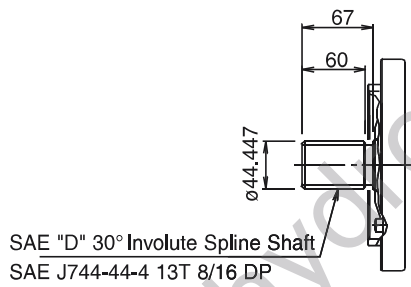

SAE Straight Shaft




ISO Straight Shaft

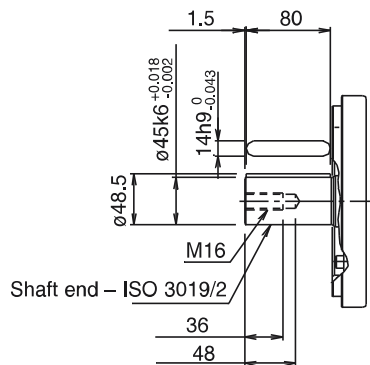

Unit Dimensions (continued)

K3VL112/140 Rear Port Option

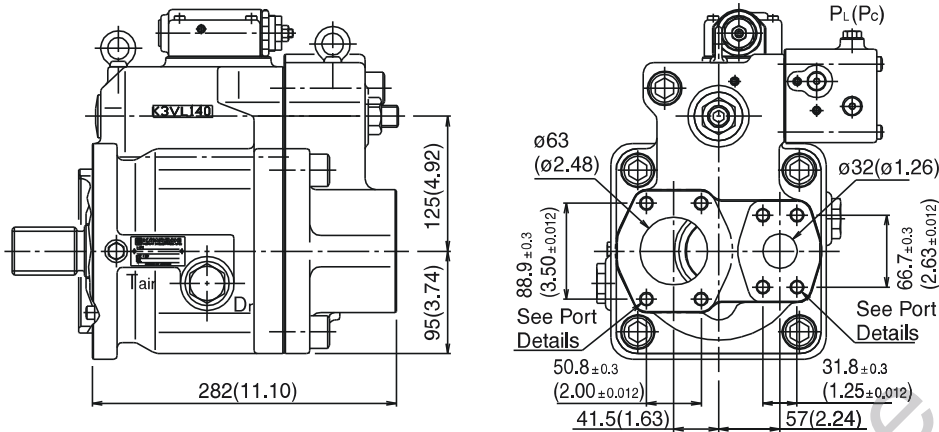

K3VL112/140 Porting Details

Main SAE Flanged Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) | Flange Threads |
|--|---------------|--|------------------------|---------------------|
| UNF Threaded Version ("S" in position 9 of model code) | | | | |
| A | Delivery Port | SAE J518C high pressure (code 62) 1 1/4" | 98 | 1/2-13UNC-2B x 22mm |
| B | Suction Port | SAE J518C Std pressure (code 61) 2 1/2" | 98 | 1/2-13UNC-2B x 22mm |

Metric Version ("M" in position 9 of model code)

| | | | | |
|---|---------------|--|-----|----------|
| A | Delivery Port | SAE J518C high pressure (code 62) 1 1/4" | 157 | M14 x 19 |
| B | Suction Port | SAE J518C Std pressure (code 61) 2 1/2" | 98 | M12 x 17 |

Auxiliary Ports

| Des. | Port Name | Port Size | Tightening Torque (Nm) |
|--|--|---|------------------------|
| SAE Version ("S", "K", "C", "R", "U", "X" or "T" in position 8 of model) | | | |
| Dr | Drain Port (x2) | SAE J1926/1 Straight thread O ring boss 3/4" OD Tube 1 1/16-12UN-2B | 167 |
| PL PC | Load Sensing Port Pressure Control Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |
| Tair | Air Bleeder Port | SAE J1926/1 Straight thread O ring boss 1/4" OD Tube 7/16-20UNF-2B | 12 |



ISO Version ("M" in position 8 of model code)

| | | | |
|----------|--|--------------------|-----|
| Dr | Drain Port (x2) | M27 x 2 DIN 3852 | 167 |
| PL PC | Load Sensing Port Pressure Control Port | M14 x 1.5 DIN 3852 | 25 |
| Tair | Air Bleeder Port | M14 x 1.5 DIN 3852 | 25 |





Unit Dimensions (continued)


K3VL112/140 (2 Bolt) Installation

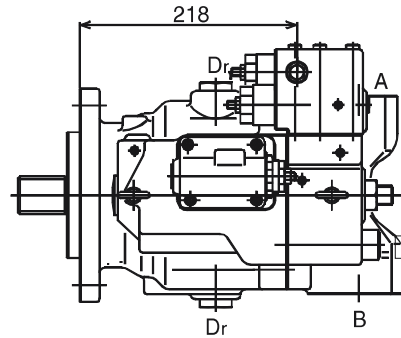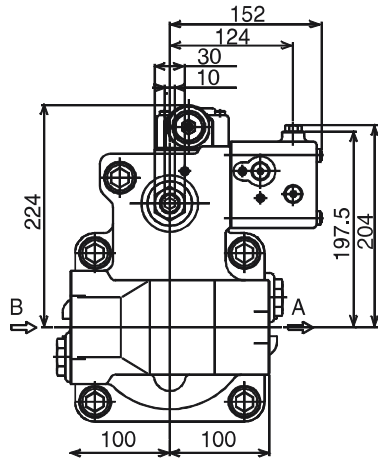

Adjustment screw for cut-off pressure Adjustment screw for differential pressure

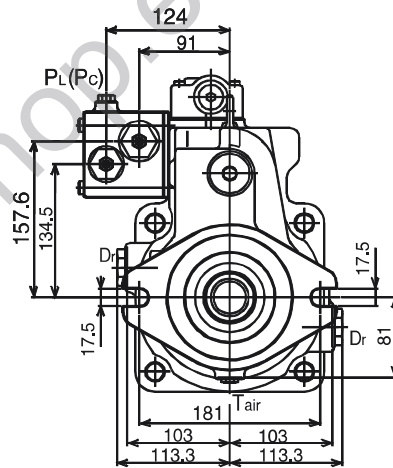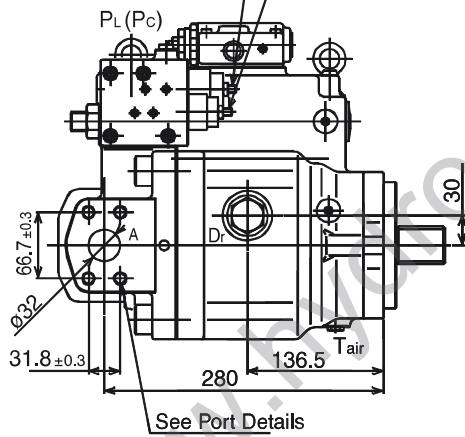


See Port Details

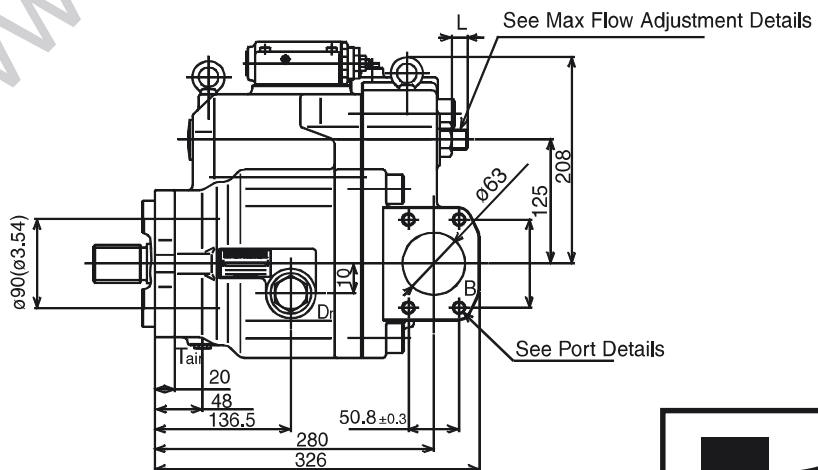


Unit Dimensions (continued)

K3VL112/140 Mounting Flange (2 Bolt) and Shaft Options



SAE "C" Type

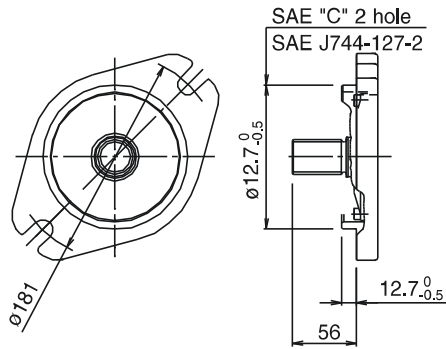

SAE "C" Spline Shaft

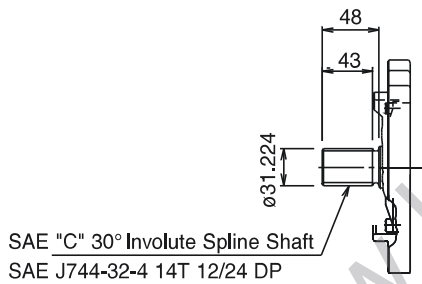

SAE "C" Straight Shaft

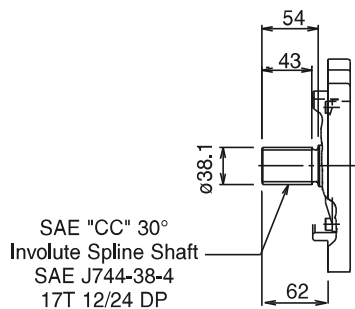


Shaft Detail – SAE "CC" Spline




Unit Dimensions (continued)

K3VL112/140 Through Drive Options


Through Drive "A"

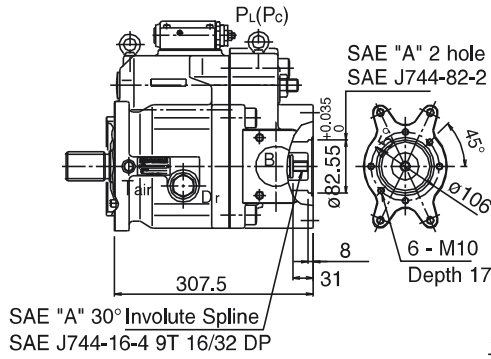


Through Drive "B"

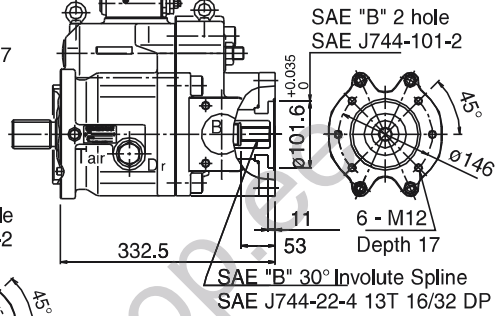


Through Drive "BB"

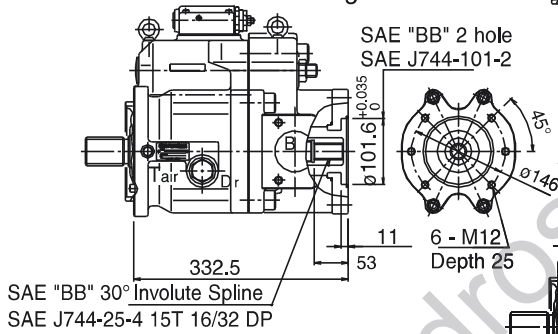


Through Drive "C"

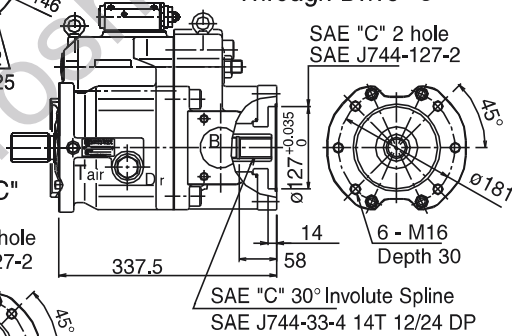

Through Drive "CC"

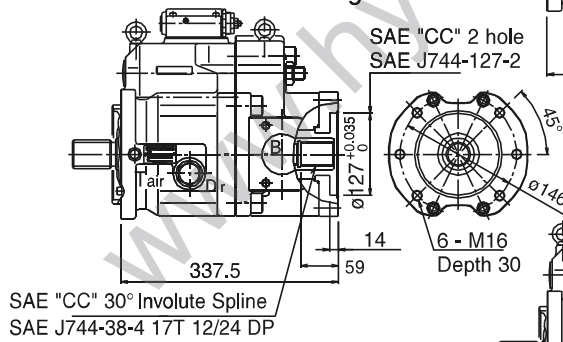


Through Drive "D"

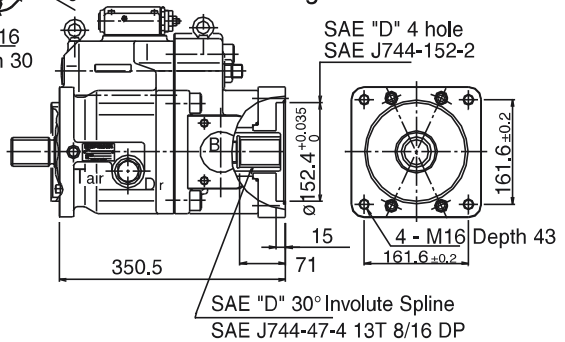


Unit Dimensions (continued)


K3VL112/140 Adaptor Kits




Cover Kit




SAE "A" T/D Kit




SAE "B" T/D Kit




SAE "BB" T/D Kit



SAE "C" T/D Kit



SAE "CC" T/D Kit



SAE "D" T/D Kit


| No | Part Name | QTY | Cover Kit | SAE "A" T/D Kit | SAE "B" T/D Kit | SAE "BB" T/D Kit |
|-----|---------------|-----|--------------|-----------------|-----------------|------------------|
| — | T/D Kit | | 29L8TN | 29LHTA | 29LHTB | 29LHT2 |
| 743 | O-Ring | 1 | 00RBG85 | 00RBG85 | 00RBG85 | 00RBG85 |
| 742 | O-Ring | 1 | — | — | 00RBG105 | 00RBG105 |
| 415 | Screw Hex SHC | 4 | — | — | 0SBM1230 | 0SBM1230 |
| 402 | Screw Hex SHC | 2 | 0SBM1020 | — | — | — |
| 317 | Subplate | 1 | — | — | 2924750-0360 | 2924750-0360 |
| 314 | Cover | 1 | 2923150-0316 | — | — | — |
| 116 | Coupling | 1 | — | 2903150-0268 | 2903150-0269 | 2903150-0270 |

| No | Part Name | QTY | SAE "C" T/D Kit | SAE "CC" T/D Kit | SAE "D" T/D Kit |
|-----|---------------|-----|-----------------|------------------|-----------------|
| — | T/D Kit | | 29LHTC | 29LHT3 | 29LHTD |
| 743 | O-Ring | 1 | 00RBG85 | 00RBG85 | 00RBG85 |
| 742 | O-Ring | 1 | 00RBG130 | 00RBG130 | 00RBG150 |
| 415 | Screw Hex SHC | 4 | 0SBM1235 | 0SBM1235 | 0SBM1250 |
| | Screw Hex SHC | 2 | — | — | — |
| 317 | Subplate | 1 | 2924750-0361 | 2924750-0361 | 2924750-0362 |
| 314 | Cover | 1 | — | — | — |
| 116 | Coupling | 1 | 2903150-0271 | 2903150-0272 | 2903150-0273 |



Unit Dimensions (continued)

K3VL200 Installation

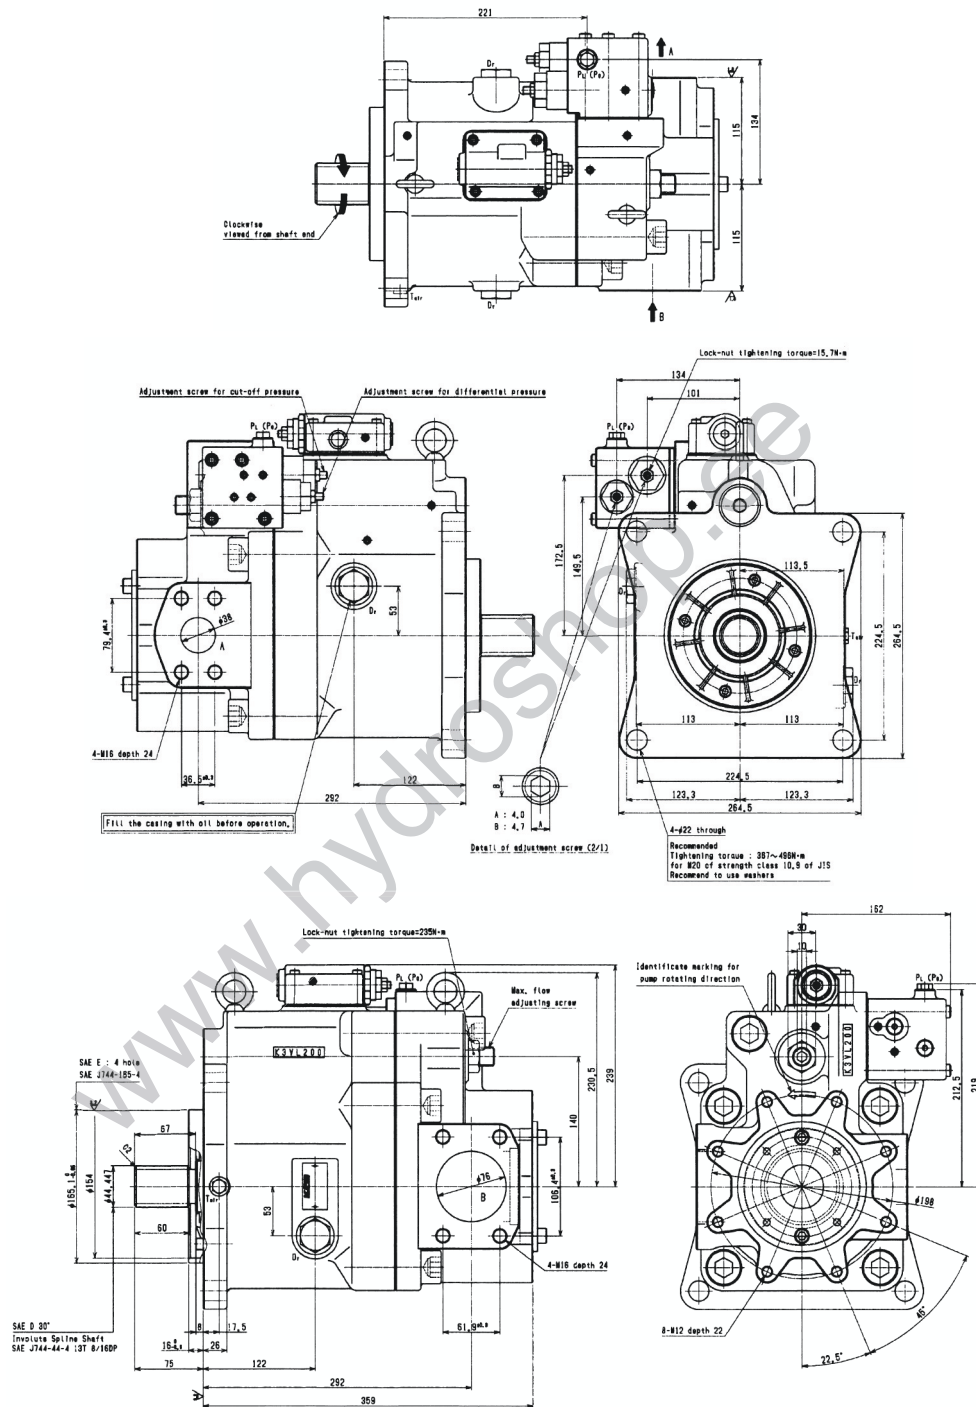

Model
K3VL

Page
61.64

Data Sheet
P-1002/01.06



Unit Dimensions (continued)

| No | Part Name | QTY | SAE "A" |
|-----|---------------------------|-----|--------------|
| — | T/D Kit | | 29LKTA |
| 116 | Coupling K3VL 200 | 1 | 2903150-0761 |
| 317 | Sub Plate K3VK 200 | 1 | 2924750-0674 |
| 407 | SHCS | 4 | 0SBM825 |
| 712 | O-Ring 84.4 I/D x 3.1 Sec | 1 | 00RBG85 |
| 742 | O-Ring 84.4 I/D x 3.1 Sec | 1 | 00RBG85 |


| No | Part Name | QTY | SAE "B" | SAE "C" | SAE "D" | SAE "E" |
|-----|--------------------|-----|--------------|--------------|--------------|--------------|
| — | T/D Kit | | 29LKTB | 29LKTC | LKTD | 29LKTE |
| 116 | Coupling K3VL 200 | 1 | 2903150-0762 | 2903150-0763 | 2903150-0764 | 2903150-0764 |
| 317 | Sub Plate K3VK 200 | 1 | 2924750-0675 | 2924750-0667 | 2924750-0677 | 2924750-0686 |
| 407 | SHCS | 8 | 0SBM1230 | 0SBM1230 | 0SBM1245 | 0SBM1245 |
| 712 | O-Ring | 1 | 00RBG120 | 00RBG125 | 00RBG125 | 00RBG125 |
| 742 | O-Ring | 1 | 00RBG105 | 00RBG130 | PCPP155 | PCPP170 |

www.hydroshock.com



Unit Dimensions (continued)

Electrical Displacement Control

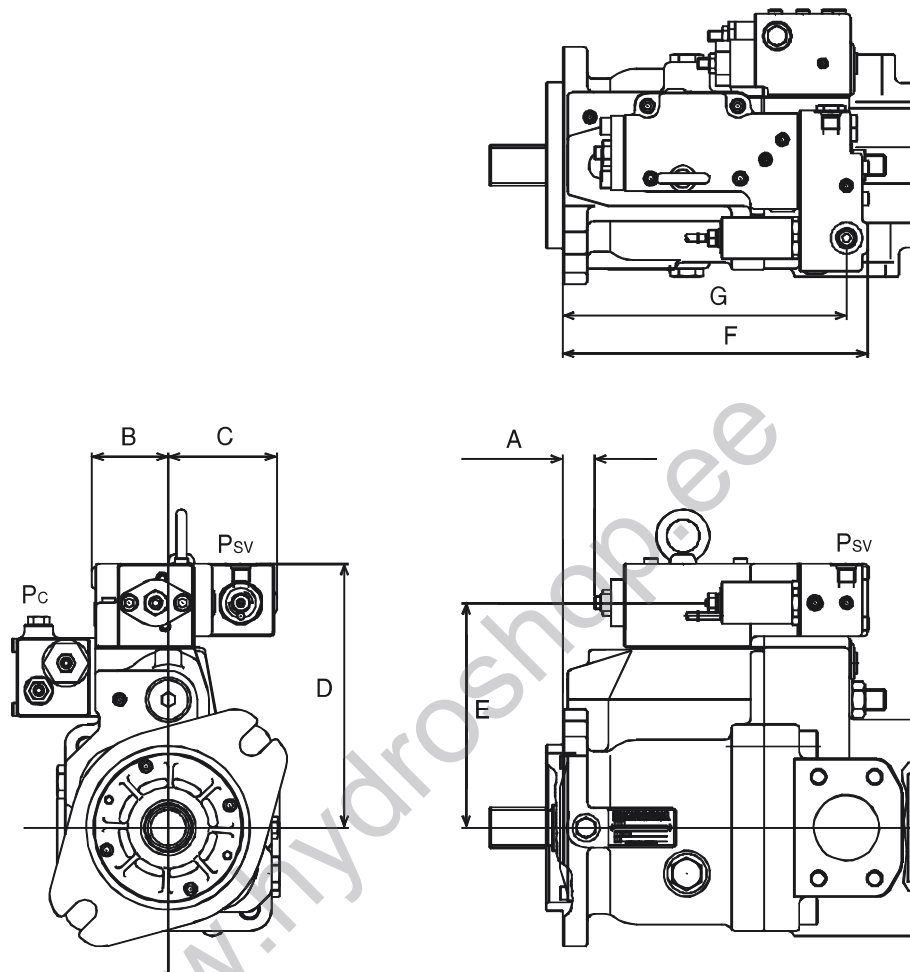

Installation Dimensions (mm)

| Pump Size | A | B | C | D | E | F | G |
|-------------|----|----|----|-----|-----|-----|-----|
| K3VL45 | 21 | 52 | 90 | 187 | 157 | 226 | 210 |
| K3VL80 | 25 | 59 | 83 | 202 | 172 | 233 | 217 |
| K3VL112/140 | 38 | 64 | 78 | 244 | 214 | 247 | 231 |

Unit Dimensions (continued)


Unloading valve module (*N)

| | A | B |
|-------------|-----|-----|
| K3VL45 | 169 | 155 |
| K3VL80 | 169 | 166 |
| K3VL112/140 | 202 | 190 |
| K3VL200 | 212 | 205 |

Proportional pressure module (*V)

| | A | B |
|-------------|-----|-----|
| K3VL45 | 179 | 233 |
| K3VL80 | 179 | 244 |
| K3VL112/140 | 212 | 280 |
| K3VL200 | 222 | 295 |

A: Distance between the centre line of the pump and the top of the bolt head for the cut off regulator.
 B: Distance between the centre line of the pump and top of the solenoid valve.

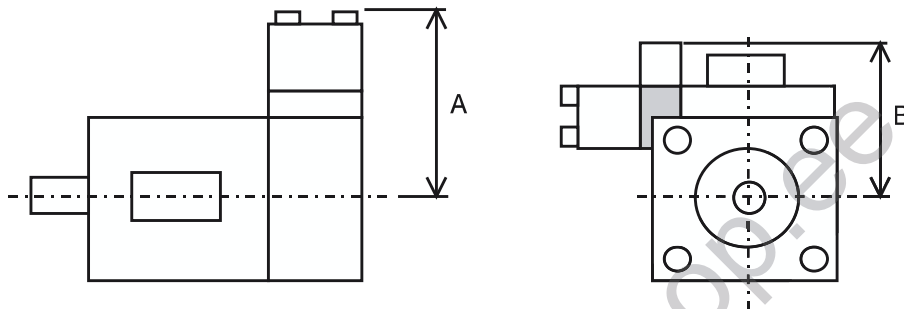

www.hydroshop.co.uk

KAWASAKI PRECISION MACHINERY (UK) LTD
 Ernesettle, Plymouth, Devon, PL5 2SA, England
 Tel: +44 1752 364394 Fax: +44 1752 364816
 E Mail: info@kpm-uk.co.uk
 Web site: <http://www.kpm-uk.co.uk>

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract

ALL RIGHTS RESERVED, SUBJECT TO REVISION

Model
K3VL

Page
64.64

Data Sheet
P-1002/01.06

