






MSS - seeria gerootormootorid ujuv völliaga



Side Ports

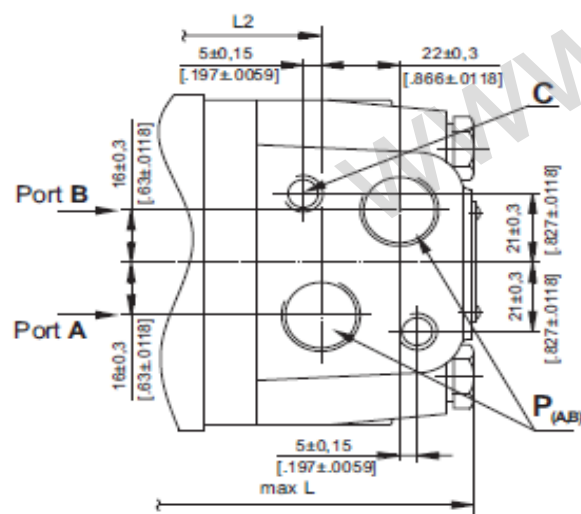


P(A,B) : 2 x G1/2"
T : G1/4"

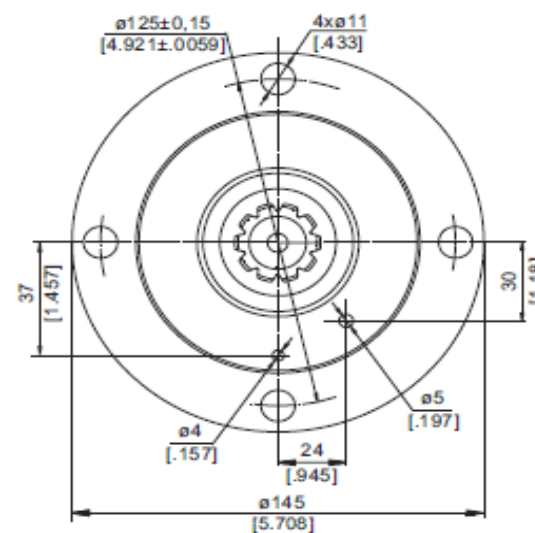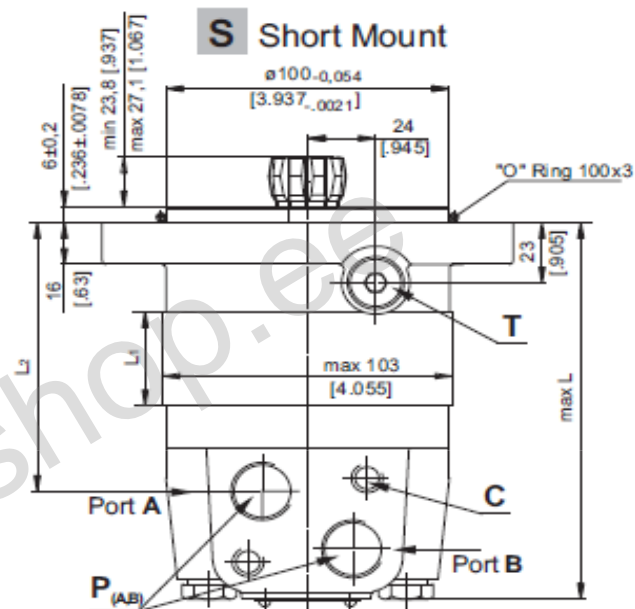



MSS - seeria gerootormootorid ujuvvõlliga

G: Internal drain channel
I: O-Ring 100x3 mm [3.94x.12 in]
K: Conical seal ring
T: Drain connection G1/4 or M14x1,5
F: Oil circulation hole
H: Hardened stop plate
J: 4xM10-16 mm [.63 in] depth, 90°

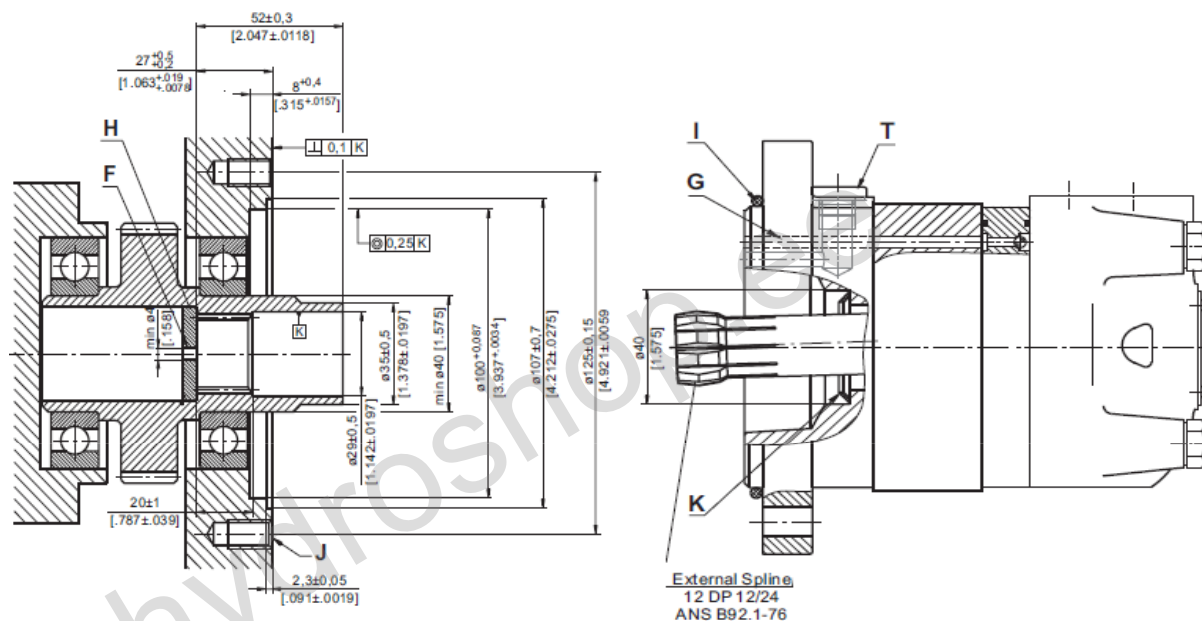

Tehnilised andmed:

Type	Displacement	Speed cont.max.	Speed min.	Pressure max. cont.	Pressure max. Int.	Torque max. cont.	Torque max. Int.
	cm ³ /rev	RPM	RPM	bar	bar	daNm	daNm
MSS80	80,5	810	10	230	295	24	31
MSS100	100	750	10	230	295	30,5	39
MSS125	125,7	600	8	230	295	37,5	49
MSS160	159,7	470	8	230	295	49	60
MSS200	200	375	6	230	295	61	72
MSS250	250	300	6	230	295	72	87
MSS315	314,9	240	5	230	295	82,5	100
MSS400	397	190	5	230	295	86,5	99
MSS475	474,6	160	5	230	295	85	99
MSS525	522,7	145	5	230	295	85	99
MSS565	564,9	130	5	230	295	85	99

Dimensions	Dimensions	Weight
L1	MAX L	
mm.	mm.	kg
14	125	7,9
17,4	129	8,1
21,8	133	8,4
27,8	139	8,8
34,8	146	9,2
43,5	155	9,7
54,8	166	10,4
69,4	181	11,3
82,6	194	12,1
74,5	186	12,6
80,2	192	13